



Material Handling Solutions and Custom Products

## BP4454B SP



### FEATURES

- ▲ Four-way entry for quicker more efficient handling
- ▲ Made from HDPE – Environmentally friendly and 100% recyclable
- ▲ Fully nestable to conserve space – Lowers return cost
- ▲ Mirror image – Pallet/lid interchangeable
- ▲ Lightweight for better Ergonomics – Worker friendly
- ▲ Lower cost alternative vs. rigid alternatives
- ▲ Interlocking pallet legs for secure stacking
- ▲ Legs without drain holes


### OPTIONS

- ▲ Custom color(s)
- ▲ Custom stripe(s) – Only in 48" direction
- ▲ Leg drain holes available
- ▲ Custom logos
- ▲ Sleeve's that are collapsible
- ▲ Pocket recesses for label placement
- ▲ Ever-Lok®2 locations for package/unit security, also eliminates the need for stretch wrapping




# BP4454B SP Specifics

## BIG PAK

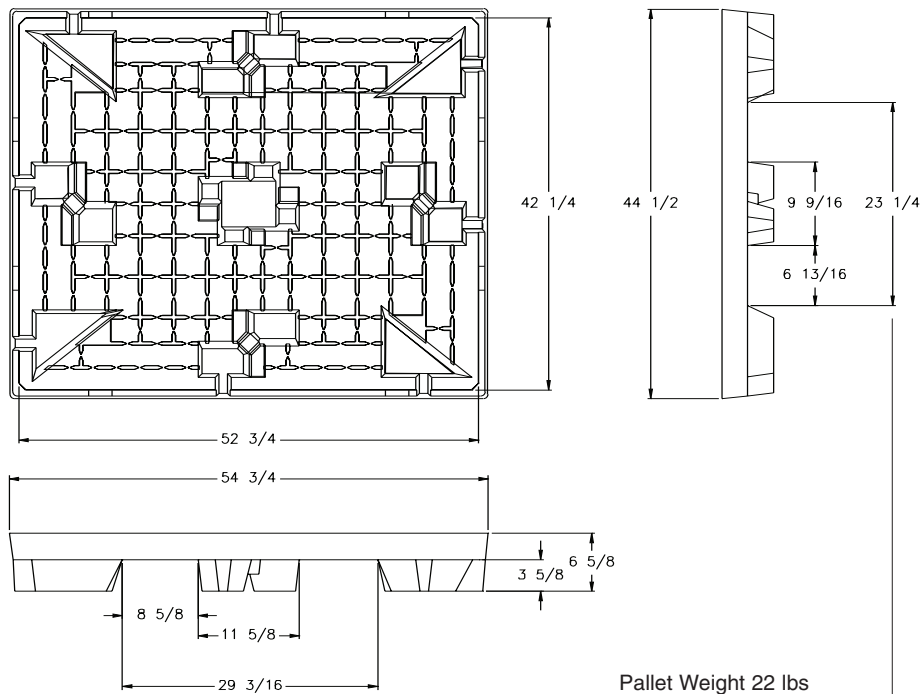


Pallet Weight 22 lbs

Interlocking pallet legs



Big Pak Sleeve Options

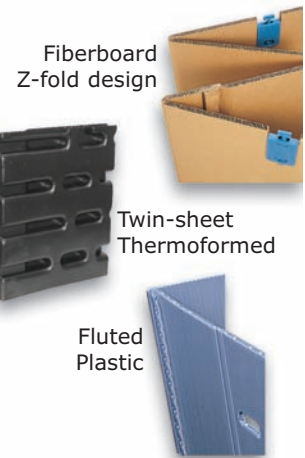

Ever-lok®2



### Load Rating

	English	Metric
Floor Load Rating	4,000 lb	1,818 kg
Fork Load Rating	800 lb	364 kg

### Packaging

Stack Height	100"	2,540 mm
# Pallets per Stack	50	
Qty Pallets per 48 ft trailer	1,000	
Qty Pallets per 53 ft trailer	1,100	
Qty Pallets per 20 ft container	400	
Qty Pallets per 40 ft container	800	
Qty Pallets per 40 ft HC	928	
Qty Pallets per 45 ft container	1,102	
Sleeve Height 2 high in trailer	44 3/8"	1,127 mm
Sleeve Height 3 high in trailer	28 1/4"	718 mm
Sleeve Height 4 high in trailer	30 1/4"	768 mm



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.