

Material Handling and Custom Thermoformed Solutions



BP4048B SP

Features

High-Density Polyethylene (HDPE) Construction

- Environmentally friendly
 - 100% recyclable
- Lightweight for better ergonomics
 - Operator/user friendly
- ISPM 15 exempt

Mirror Image

- Pallet and lid are interchangeable

Low Profile

- Minimizes storage space
- Reduces shipping costs

Fully Nestable

- Nesting conserves space and reduces shipping costs
- Interlocking pallet legs for secure stacking

4-way Forklift and Forkjack Entry

Lower cost alternative vs. rigid alternatives

Easy to Clean

Weather Resistant


Options

- Ever-Lok2[®] locations
 - Provides unit security
 - Eliminates stretch wrapping
- Collapsible Sleeves
- Wide range of stripe colors
- One or multiple stripes in 48" direction
- Custom logos
- Pocket recesses for label placement
- Leg drain holes available


Fully Nestable




BP4048B SP Specifics

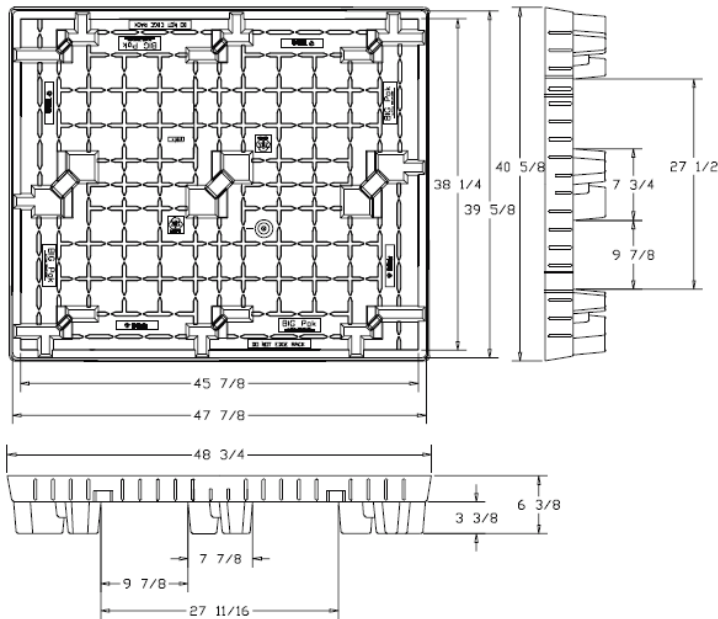

INTERLOCKING PALLET LEGS



BIG PAK SLEEVE OPTIONS

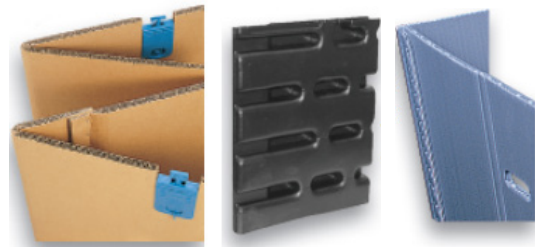

Fiberboard
Z-fold design

Twin-Sheet
Thermoformed

Fluted
Plastic

SHIPPING INFORMATION

Stack Height	100" / 2,540 mm
Qty of Pallets per Stack	50
Qty Pallets per 53' Trailer	1,500 pallets / 30 skids
Qty Pallets per 20' Container	500 pallets / 10 skids
Qty Pallets per 40' container	1,000 pallets / 20 skids
Qty Pallets per 40' HC	1,080 pallets / 20 skids / 54 high
Sleeve Height: 2 high in trailer	44.5" / 1,130 mm
Sleeve Height: 3 high in trailer	28.5" / 724 mm
Sleeve Height: 4 high in trailer	20.25" / 514 mm
Sleeve I.D.	45.875"x38.25"/1,165.23mmx971.55mm

EVER-LOK2®



Model BP4048B SP	Ratings		Weight
	Fork	Floor	
	800 lbs/364 kg	4,000 lbs/1,818 kg	17 lbs / 7.71 kg



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.