
Bulk Bag Pallet™

Weighs less than 15 lbs., allowing you to optimize your load



Can be Used with Conveyor Systems



No Nail Heads or Wood Splinters to Avoid Contamination and Bag Tears





TriEnda is now offering our new FIBC Bulk Bag Pallet. A unique shipping solution that safely transports goods at a price competitive to wood. Our pallet has been rigorously tested to withstand the shipping demands of your industry. This plastic pallet is ISPM exempt and allows for clean, dry, and sanitary shipping and transport of bulk bags and super sacks. Unloading is easy with the 4-way entry for forks, and the risk of damage is minimized with the enclosed fork holes. Designed to handle safe workloads rated at 5:1 or 6:1, this long-lasting reusable pallet is a smart choice for the environment and your bottom line.



ADVANTAGES



Recyclable, Cradle to Cradle.



ISPM 15 Exempt Sanitary, ships worldwide without costly delays.



Humidity-resistant to keep breakage to a minimum





Impact resistant for long cycle life.




trienda.com

Bulk Bag Pallet™ Specifications

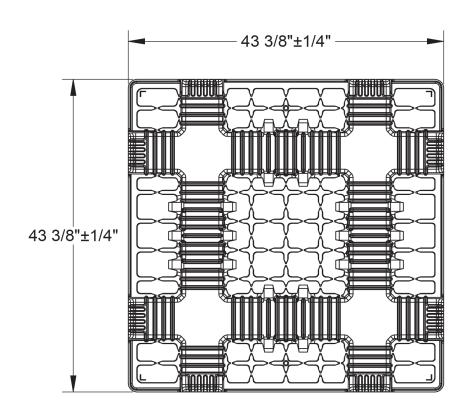



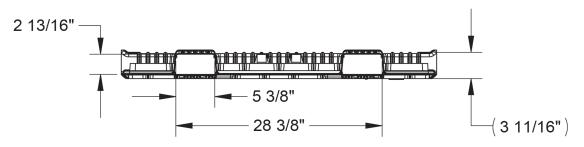

PRODUCT	DIMENSIONS			WEIGHT	RATINGS		STACK	QTY PER STACK			QTY 53'	QTY	QTY
	L	W	Н	AND COLOR	STATIC	DYNAMIC	HEIGHT	53'	SC	НС	TLD	40' SC	40' HC
Bulk Bag Pallet	43.38"	43.38"	3.69"	14.5 lbs 6.58 kg Black	4,600 lbs 2,807 kg	2,600 lbs 1,179 kg	100" 2,540 mm	28	26	28	784 28 skids	520 20 skids	560 20 skids
Heavy Duty Bulk Bag Pallet	43.38"	43.38"	3.69"	19.6 lbs 8.9 kg Black	6,000 lbs 2,722 kg	3,400 lbs 1,542 kg	100" 2,540 mm	28	26	28	784 28 skids	520 20 skids	560 20 skids



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.