

Systems Board


Thermoformed HDPE Twin Sheet Construction

FEATURES

- Customizable to fit any system
- Fork entry ramps*
- Stacking cones*
- Use with conveyor systems and **ASRS** (automated retrieval and storage systems)
- No nails or wood splinters
- ISPM 15 exempt
- Recessed banding slots*
- Allows maximum storage and transportation efficiency



DESIGN OPTION 1
TOP VIEW

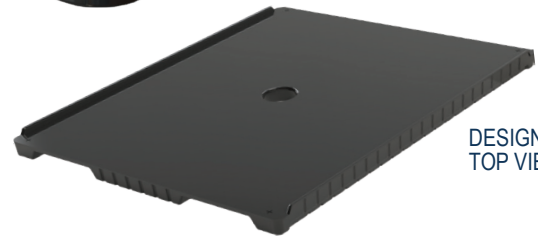

DESIGN OPTION 2
TOP VIEW

OPTIONS

- Steel, aluminum, or other substrates can be encapsulated for additional support with conveyors and racking systems
- Hand holes*
- TruGrip[™]
- Stripe I.D.
- Custom logos and/or label locations



Conveyable and
ASRS Compatible

* AVAILABLE IN SOME MODELS

TruGrip[™]

An anti-skid surface like no other


Introducing TruGrip[™] offering the highest COF available on the market using a proprietary rubber-like material. Prevents slippage of boxes on boards and conveyor systems.

SPECIFICATIONS

PRODUCT	DIMENSIONS					WEIGHT		STACK HEIGHT	QTY PER STACK			QTY 53' TLD	QTY 40' SC	QTY 40' HC
	L	W	H	DECK HEIGHT	STACKING CONE HEIGHT	WITH SUBSTRATE	PLASTIC ONLY		TLD	SC	HC			
44 x 54 (Option 1)	53.875	44	1.8	1.8	N/A	50 lbs 22.68 kg	22.63 lbs 10.26 kg	102"	52	48	54	1,144	960	1,080
40 x 48 (Option 2)	48	40	2.625	2.625	N/A	38 lbs 17.24 kg	18 lbs 8.16 kg	102"	36	33	38	1,080	792	912
46 x 54	54	46	1.5	1.5	N/A	39.3 lbs 17.83 kg	21.5 lbs 9.75 kg	102"	64	58	66	1,408	1,160	1,320
47 x 51	51	47	2.375	1.625	0.75	57 lbs 25.85 kg	22 lbs 9.98 kg	102"	48	37	50	1,152	370	500
48 x 48 (Option 3)	48	48	2.75	1.75	1	35 lbs 15.88 kg	22 lbs 9.98 kg	102"	54	49	56	1,404	490	560


Systems Board

SPECIFICATIONS

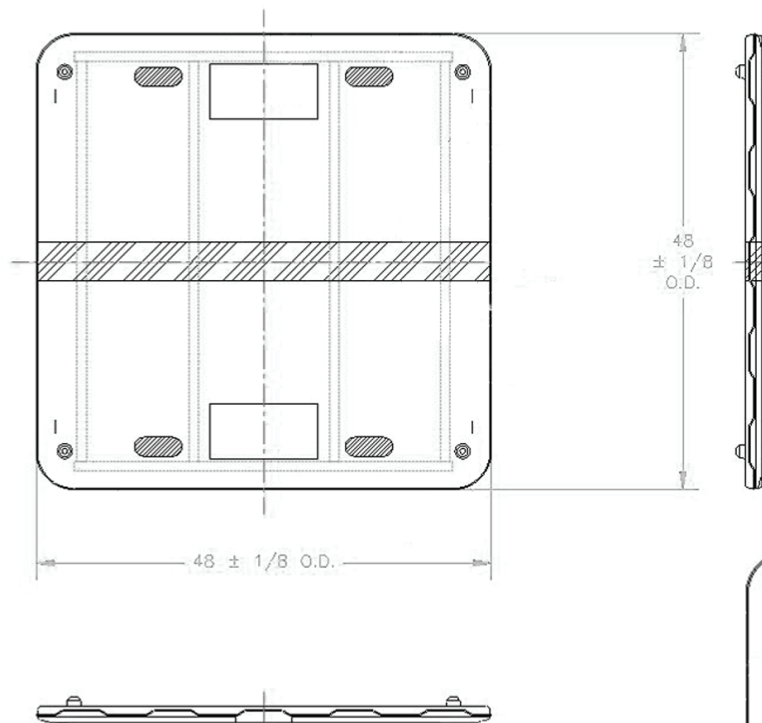

DESIGN OPTION 3
TOP, BOTTOM, AND
SIDE VIEWS

OPTIONS 1 & 2 - TOP VIEW ON PAGE 1
OPTION 3 - DRAWING ABOVE
ADDITIONAL DESIGN OPTIONS AVAILABLE UPON REQUEST

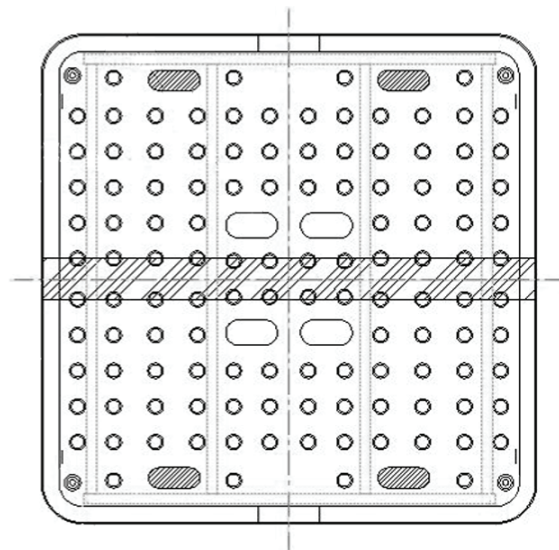

Advantages

Environmentally Friendly
ISPM 15 Exempt
Long Service Life



Easy
Clean



Sanitary



Weather
Resistant



Impact
Resistant



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



FOR INFORMATION PLEASE CONTACT:
sales@trienda.com 1-800-356-8150