

Tough Pallet 40x48

HEAVY DUTY Thermoformed HDPE Construction

TOP VIEW



- Sanitary--no hollow areas
- · Molded in no-rust steel bars for strength & rigidity
- Thick nominal walls of 0.35"
- · Provides minimal dynamic and rack deflection
- Unique design allows for racking pallet in 40" direction
- Lightweight and nestable--minimizing storage space
 and reducing shipping costs
- Standard two 4" yellow stripes in 48" direction

OPTIONS

- Drain holes
- Wide range of stripe colors
- One or multiple stripes in 48" direction
- FDA materials available with virgin resin



Secure Combo Hold



Racking

Feature


BOTTOM VIEW

Fully Nestable

SPECIFICATIONS

PRODUCT	DIMENSIONS			WEIGHT	RATINGS			STACK	QTY PER STACK		QTY	QTY	QTY
	L	w	H	AND COLOR	STATIC	DYNAMIC	UNSUPPORTED RACK	HEIGHT	STD.	нс	53' TLD	40' SC	40' HC
Reinforced Tough Pallet	48" 1,219.2 mm	40" 1,016 mm	7.75" 196.9 mm	35 lbs 15.88 kg Black	8,000 lbs 3,628.74 kg	4,000 lbs 1,814.37 kg	2,100 lbs 952.5kg	100" 2,540 mm	27	28	810	540	560
Tough Pallet	48" 1,219.2 mm	40" 1,016 mm	7.75" 196.9 mm	28 lbs 12.70 kg Black	8,000 lbs 3,628.74kg	3,000 lbs 1,360.78 kg	1,500 lbs 680.39 kg	100" 2,540 mm	27	28	810	540	560

Tough Pallet SPECIFICATIONS

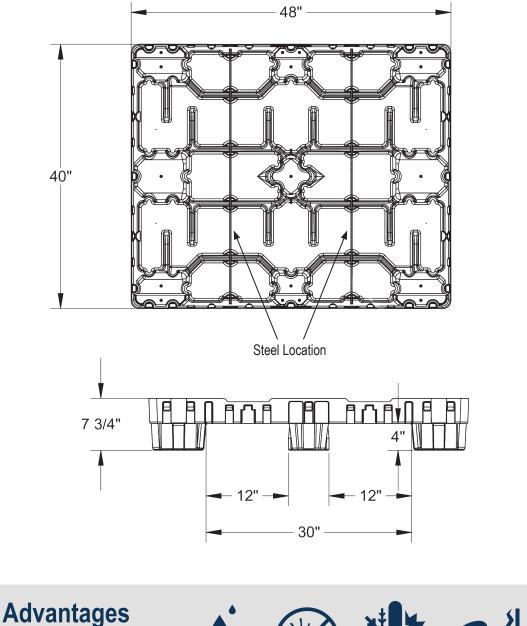

Environmentally Friendly ISPM 15 Exempt Long Service Life





Resistant

Impact Resistant 4-Way Forklift



4-Way Forklift & Forkjack Entry

10"

10"

28"

匝

▣₽

Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



FOR INFORMATION PLEASE CONTACT: sales@trienda.com 1-800-356-8150