

# BigPak<sup>®</sup> 40x48 TP-TC

Thermoformed HDPE  
Twin Sheet Construction

## FEATURES

- Ever-Lock2<sup>®</sup> - provides unit security and eliminates need for stretch wrapping
- Conveyable
- Accommodates a triple wall corrugated sleeve

## OPTIONS

- With or without Ever-Lock2<sup>®</sup>
- Wide range of pallet stripe colors
- One or multiple stripes in 48" direction
- Leg drain holes
- Custom logos



Ever-Lock2<sup>®</sup>

### COLLAPSABLE SLEEVE OPTIONS



Fiberboard  
Z-fold



Twin-Sheet  
Thermoformed



Plastic



Nestable Conveyable  
Pallet Design




Nestable Conveyable  
Cover Design

## SPECIFICATIONS


PRODUCT	DIMENSIONS			WEIGHT AND COLOR	RATINGS		STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
	L	W	H		FORK	FLOOR		STD.	HC			
BP4048W TP Twin Sheet Pallet	48" 1,219.2 mm	40" 1,016 mm	3.75" 95.25 mm	23 lbs 10.43 kg  Black	1,200 lbs 545 kg	7,500 lbs 1,409 kg	100" 2,540 mm	40	44	1,200/ 30 Skids	800/ 20 Skids	880/ 20 Skids
BP4048W TC Twin Sheet Cover	48" 1,219.2 mm	40" 1,016 mm	2.375" 60.33 mm	13 lbs 5.90 kg Black			100" 2,540 mm	40	44	1,200/ 30 Skids	800/ 20 Skids	880/ 20 Skids

# Big Pak® 4048 TP - TC SPECIFICATIONS

## CONVEYABLE PALLET

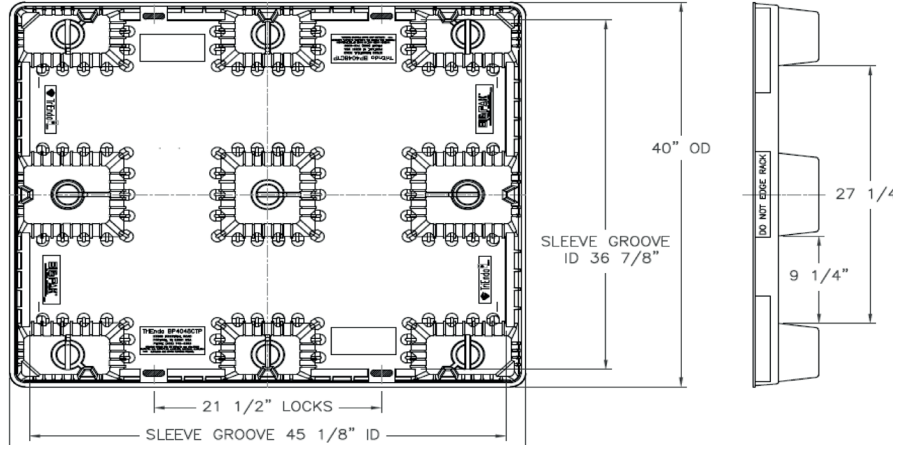

## CONVEYABLE COVER

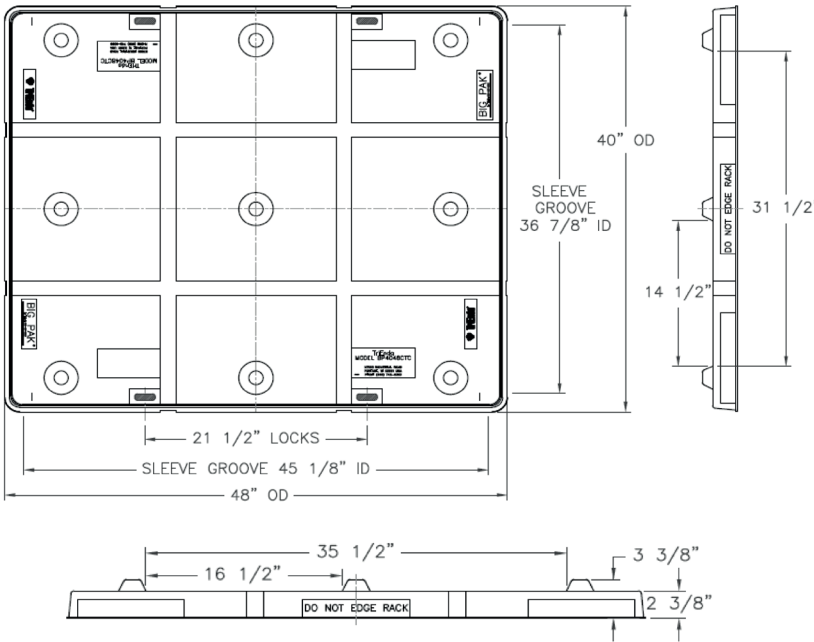

## SLEEVE SHIPPING INFORMATION

QTY PER STACK	SLEEVE HEIGHT	SLEEVE I.D.
2 High in Trailer	44.5" 1,130 mm	45.125" x 36.875"
3 High in Trailer	28.5" 724 mm	45.125" x 36.875"
4 High in Trailer	20.25" 514 mm	45.125" x 36.875"

## Advantages

Environmentally Friendly  
ISPM 15 Exempt  
Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant



4-Way Forklift & Forkjack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



FOR INFORMATION PLEASE CONTACT:  
sales@trienda.com 1-800-356-8150