



GS 48x40 Mid-Duty Pallet

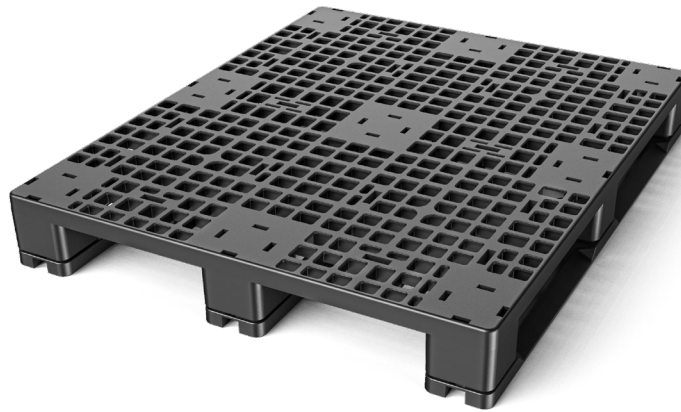

Top view

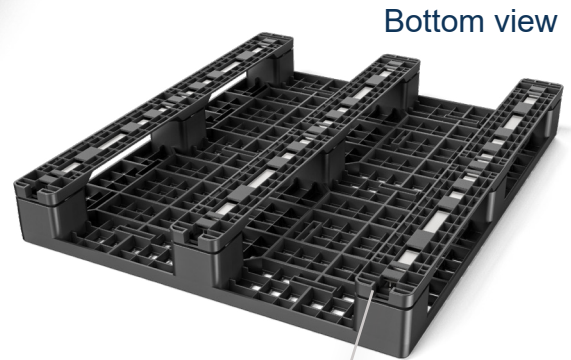


Bottom view

FEATURES

- High-pressure injection molded design using HDPE for optimal performance and durability
- Runner system in 48" direction for enhanced versatility and racking capability
- Grommets on top and bottom decks to mitigate slippage
- 18 grommets in top deck, 6 grommets in bottom deck
- Environmentally friendly and 100% recyclable
- No splinters, broken wood, or nails
- Sanitary and easily cleanable surface

OPTIONS

- Different quantities (0 and 3) of fiberglass rods to accommodate most racking requirements
- Alternative material blends and colors for custom applications
- Ink stamping for company logos and branding




Reinforcement Rods

SPECIFICATIONS

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT AND COLOR	RATINGS			QTY 53' TLD	QTY 40' SC
		L	W	H		DYNAMIC (UP TO)	STATIC (UP TO)	RACKING (UP TO)		
Mid-Duty 48x40	Mid-Duty 3-Runner/ No Rod	48" 1,219 mm	40" 1,016 mm	6" 152.4 mm	42 lbs 19 kg Black	4,000 lbs 1,814 kg	12,000 lbs 5,443 kg	N/A	540	320
Mid-Duty 48x40	Mid-Duty 3-Runner/3 Rod	48" 1,219 mm	40" 1,016 mm	6" 152.4 mm	46 lbs 20.86 kg Black	5,000 lbs 2,268 kg	12,000 lbs 5,443 kg	1,800 lbs 816.5 kg	540	320

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

Mid-Duty 48x40 3 Runner SPECIFICATIONS

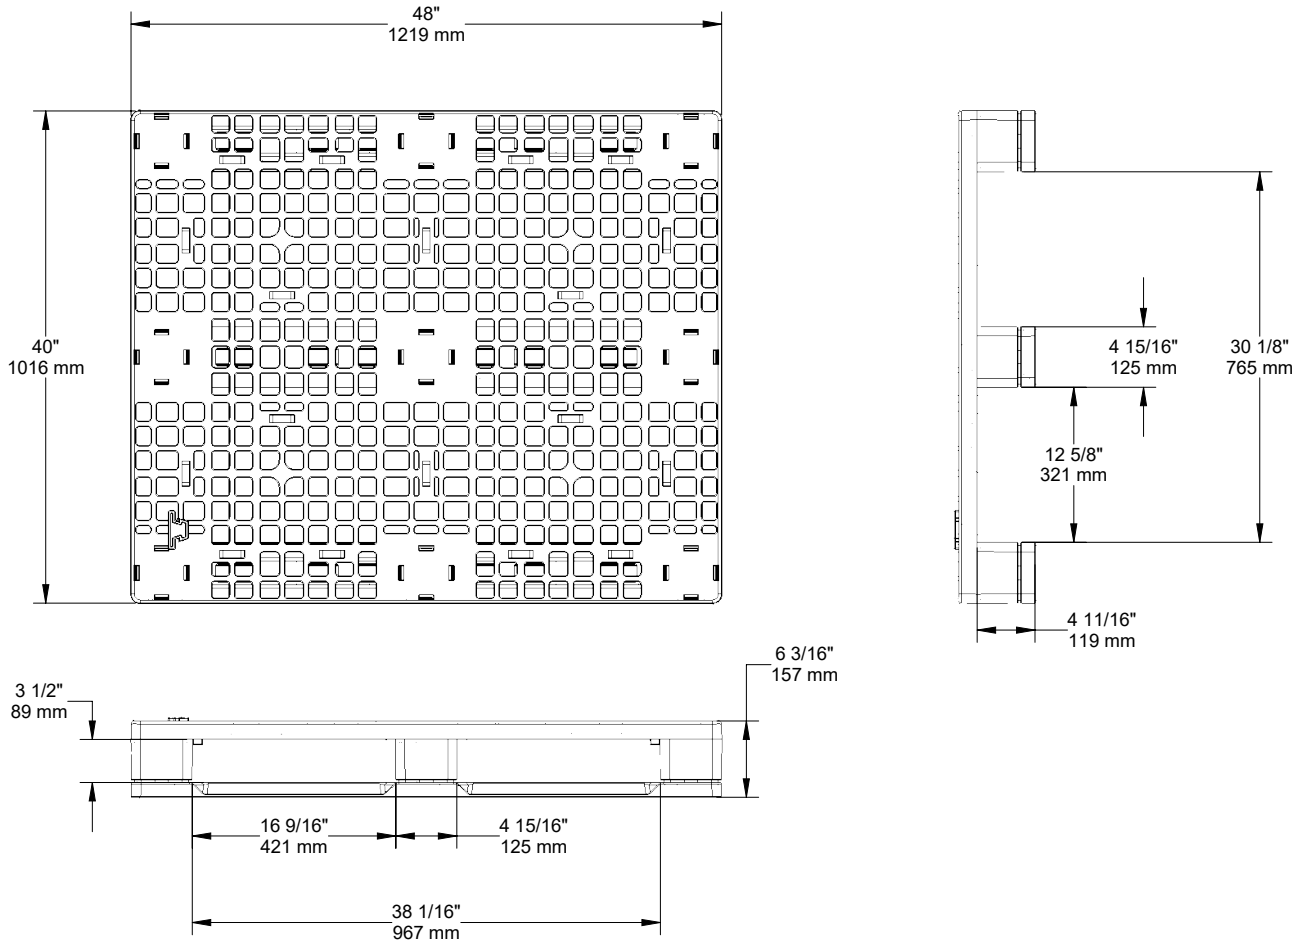

Pallet Advantages

Environmentally Friendly
ISPM 15 Exempt
Long Service Life



Easy
Clean



Sanitary



Weather
Resistant



Impact
Resistant



4-Way Forklift
& Forkjack
Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

