


# GS 48x40

## Light Duty Rackable Pallet

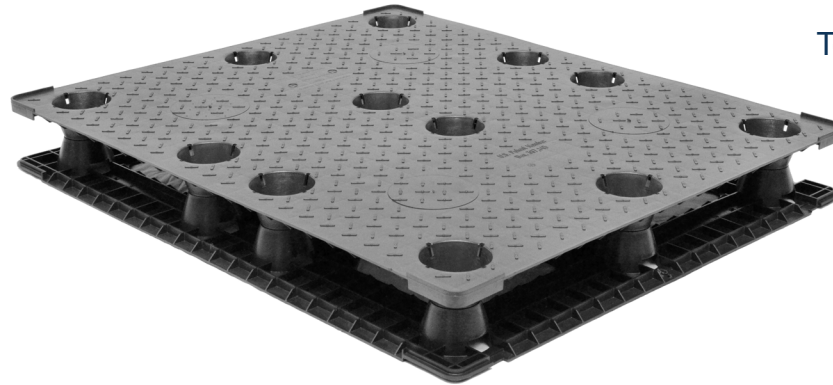

Top view

### FEATURES

- High-pressure injection molded design
- Flat deck reduces racking contamination
- Easy two piece inverted cone snap design
- 100% recycled PP (Poly Propylene)
- Environmentally friendly, reuseable and recycleable
- No splinters, broken wood, or nails
- Sanitary and easily cleanable surface
- Impact and weather resistant
- Stackable and conveyable

Bottom view



### OPTIONS


- Alternative material blends and colors for custom applications
- Ink stamping for company logos and branding
- RFID tags for asset tracking

### SPECIFICATIONS

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT AND COLOR	RATINGS			Assembled QTY 53' TLD	Unassembled QTY 53'
		L	W	H		DYNAMIC (UP TO)	STATIC (UP TO)	RACKING (UP TO)		
Light Duty 48x40	Light Duty Rackable Pallet (Full Picture Frame)	48" 1,219 mm	40" 1,016 mm	5.5" 139.7 mm	31 lbs 14.1 kg Black	2,800 lbs 1,270 kg	15,000 lbs 6,804 kg	500 lbs 227 kg	570	1,950

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

# Light Duty 48x40 Rackable SPECIFICATIONS

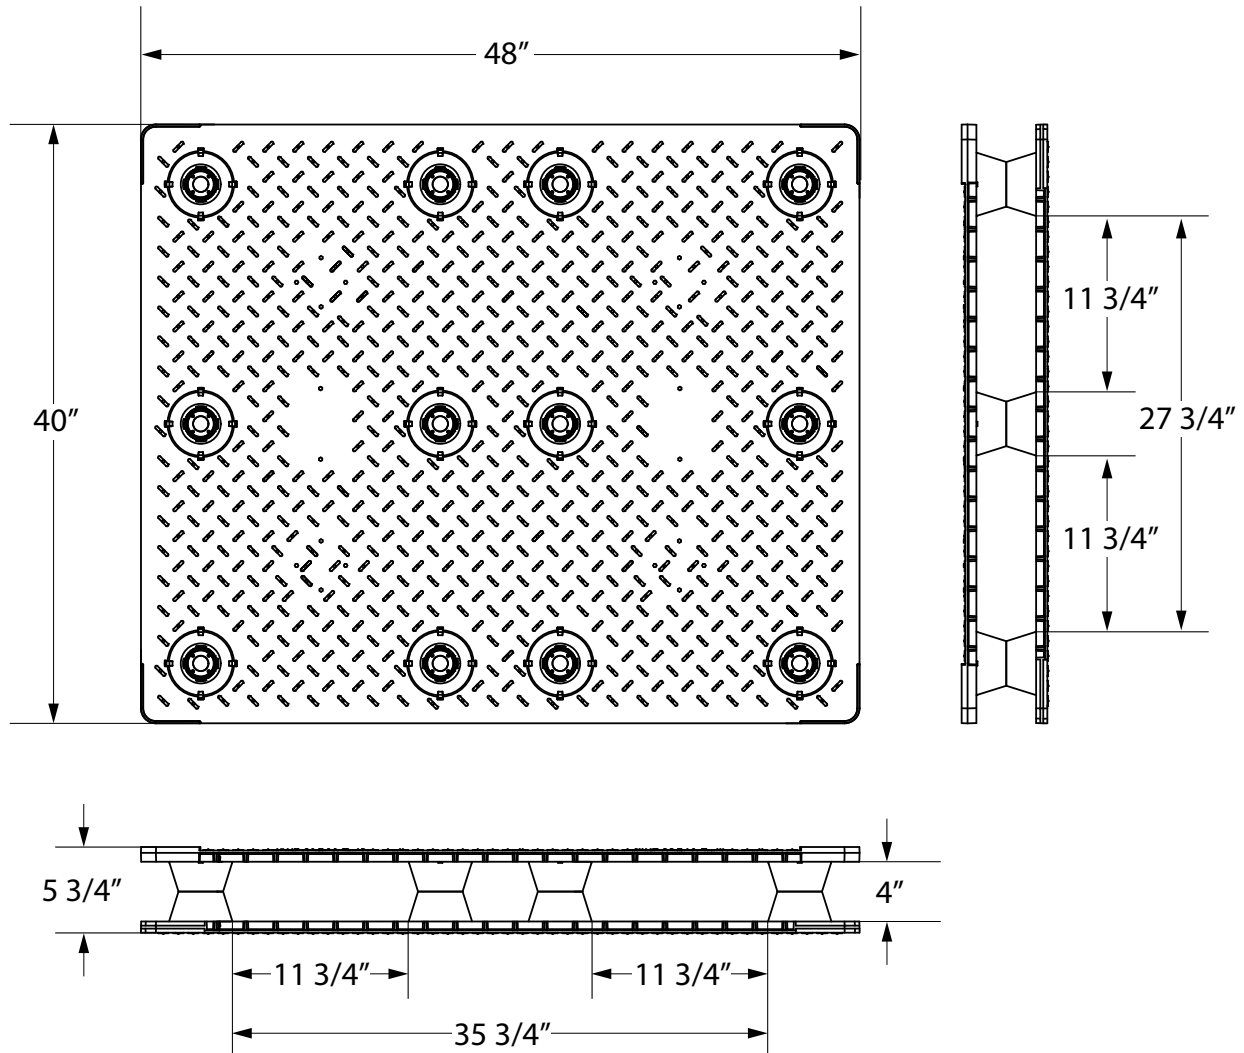

## Pallet Advantages

Environmentally Friendly  
ISPM 15 Exempt  
Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

