

PRODUCT DETAILS AND SPECIFICATIONS

BigPak[®]

44x48B SP

Thermoformed HDPE Single Sheet Construction

01 / Details

FEATURES

- Pallet and lid are interchangable •
- Minimizes storage space, reduces shipping costs •
- Lightweight for better ergonomics •

OPTIONS

- Ever-Lok® provides unit security and eliminates stretch wrapping
- One or multiple stripes in 48" direction •
- Wide range of stripe colors •
- Collapsible sleeves •
- Leg drain holes





Plastic

Twin-Sheet Thermoformed







Interlocking Pallet Legs




Specifications 02 /

QTY PER RATINGS DIMENSIONS STACK STACK QTY QTY QTY WEIGHT COLOR PRODUCT DESCRIPTION HEIGHT 53' TLD 40' SC 40' HC FORK FLOOR STD. L w н HC 48.25" 44.25" 6.125" Single Sheet 22 lbs 800 lbs 4,000 lbs 100" 1,400/ 900/ 972/ BP4448B SP Black 50 54 Pallet 1,226 mm 1,124 mm 156 mm 9.98 kg 364 kg 1,818 kg 2,540 mm 28 Skids 18 Skids 18 Skids

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

Nestable Pallet

Big Pak[®] 44x48B SP SPECIFICATIONS

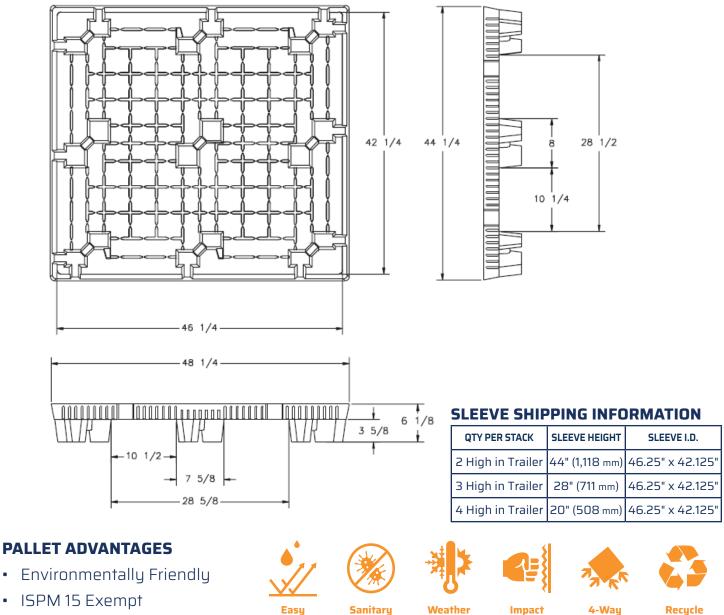

Long Service Life •

•

Easu Clean

Weather Resistant

Resistant

4-Way Forklift/jack Entry

Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



CONTACT US

N7660 Industrial Road Portage, WI 53901 www.trienda.com | sales@trienda.com 1-800-356-8150

