

CH30000 Series

Commercial Highway Wheel Packs

22" & 24"

Manufactured from HMW-HDPE

01 / Details

TRAYS

FEATURES


- Positive locking pallet base for safe and secure stacking
- Stackable by design for effective storage and return shipping
- Conveyable
- Secure loads with shrink wrap or non-metallic bands in specially formed banding slots
- Drain holes alleviate water accumulation

OPTIONS

- Custom stripe identification
- Pallets, trays and caps allow shipping labels to be attached via wire tags
- Custom colors
- Formed-in logos
- Ergonomic hand and robot holes



Drain Holes



Positive Locking Pallet Base


02 / Specifications

PRODUCT #	DESCRIPTION	DIMENSIONS		COLOR	WHEELS PER LAYER	PER STACK		53' FULL TRUCK LOAD	
		L	W						
CH 30000	CH 30000 Pallet	83.5"	52"	Black	-	20 Pallets		240 Pallets	
CH 22245	22" & 24.5" Wheel Tray & Cover	84"	52.5"	Black	6/Tray	75 Trays	75 Covers	900 Trays	900 Covers

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

CH30000 - Commercial Highway Wheel Packs

SPECIFICATIONS

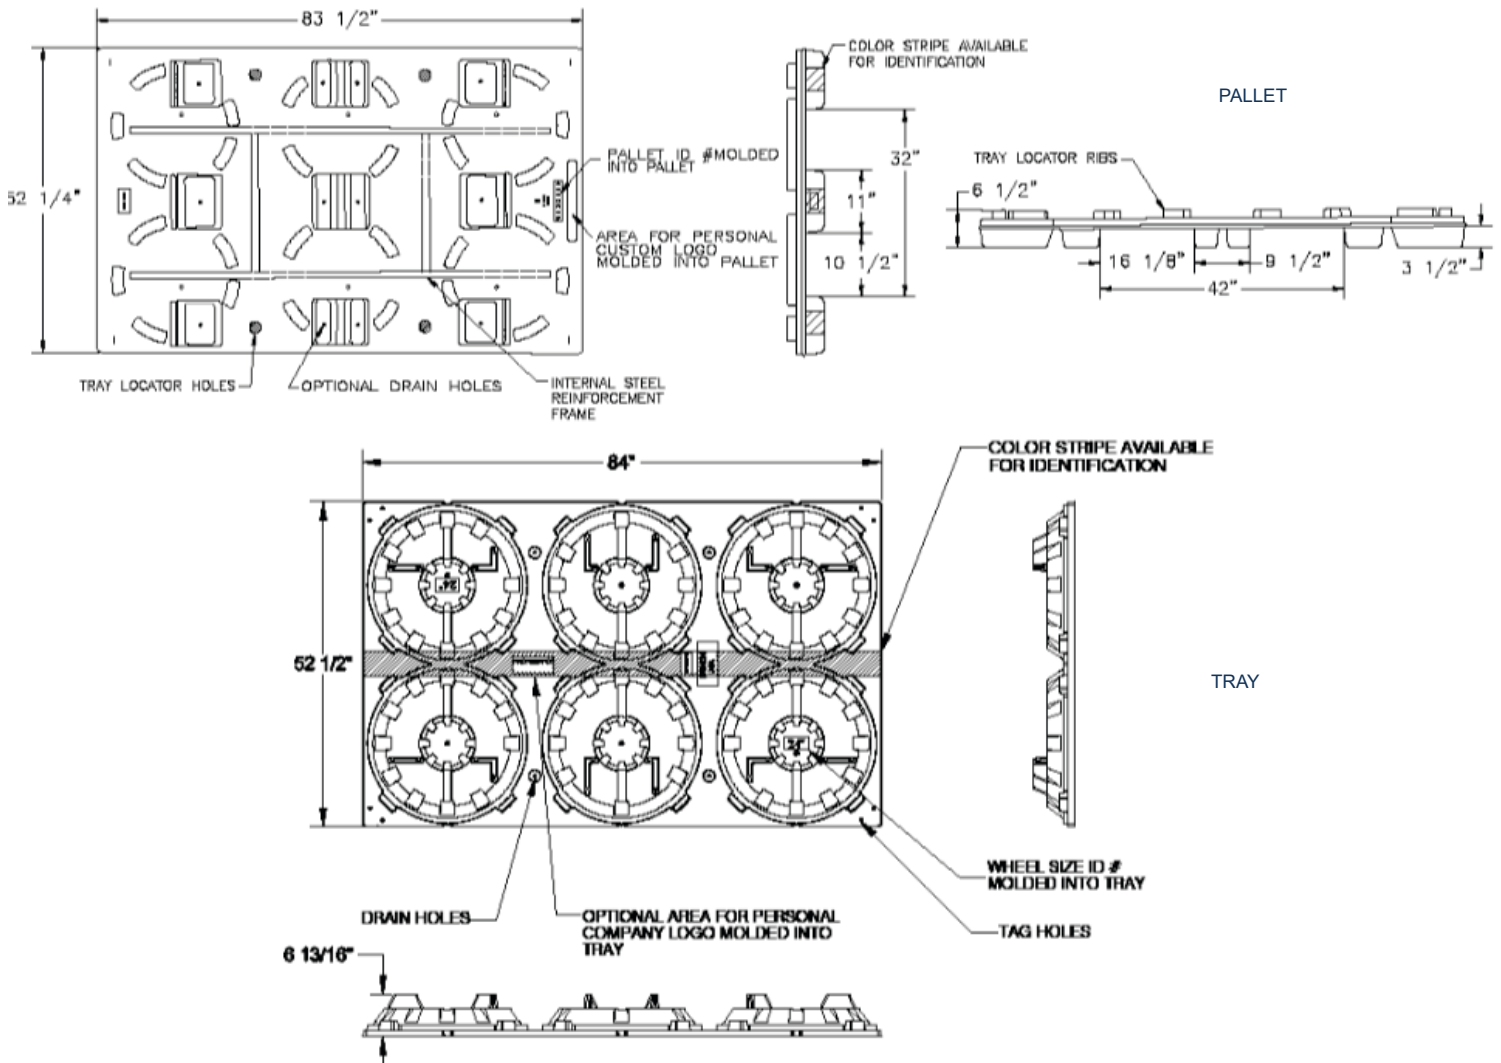

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant



4-Way Forklift/jack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

