

## PRODUCT DETAILS AND SPECIFICATIONS



### **02 / Specifications**

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		PALLETS	STACKS	QTY	PARTS PER	STACKS	QTY PER
		L	w	н	WEIGHT	COLOR	DYNAMIC	STATIC	PER STACK	PER TLD	53' TLD	STACK SC	PER SC	40' SC
GS 45x48	Injection Molded Pallet	48.88" 1,242 mm	45.88" 1,165 mm	6" 152 mm	59 lbs 9.5 kg	Black	6,000 lbs 2,722 kg	40,000 lbs 18,144 kg	20	26	520	17	18	306
T45x48	Single Sheet Lid	49" 1,245 mm	46" 1,168 mm	4.125" 105 mm	18 lbs 8 kg	Black	n/a	n/a	74	26	1,924	74	17	1,258

**Nestable Design** 

1" Webbing/ 59" Min.


Length Easy Grip Loops

Locations Available in

Length and or Width

# GS 45x48 Pallet & Lid

### **SPECIFICATIONS**

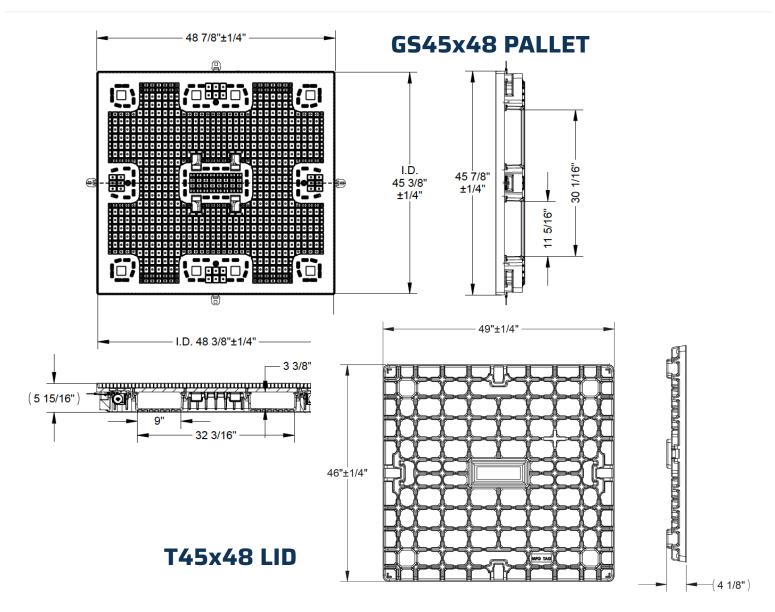

#### **PALLET ADVANTAGES**

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant




4-Way Forklift/jack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.





901

