

International Pallet

1200x800 mm

Thermoformed HDPE
Twin Sheet Construction


01 / Details

FEATURES

- Impact absorbing TriMax™ design for added stiffness and durability
- Lightweight for better ergonomics
- Oval leg design for minimized damage
- Nestable 3:1

OPTIONS

- RFID
- TruGrip™ highest coefficient of friction
- Custom labels
- Drain holes

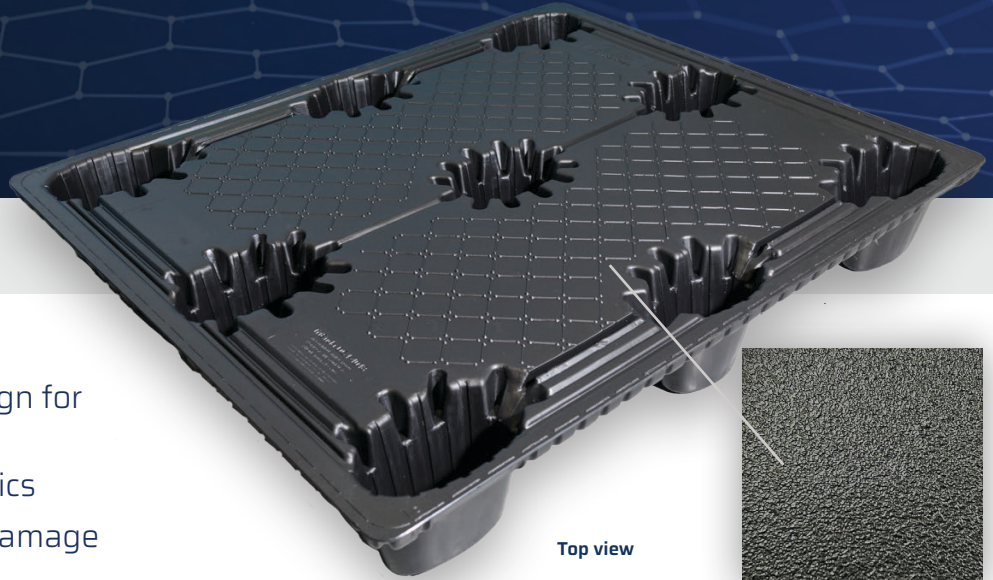

TruGrip™
An anti-skid surface like no other

Introducing TruGrip™ offering the highest COF available on the market using a proprietary rubber-like material. Prevents slippage of boxes on fork tines and on floors.



Nestable Design


02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		QTY PER STACK		QTY 53' TRUCK	QTY 40' SC
		L	W	H			DYNAMIC	STATIC	PALLETS PER STACK	PALLETS PER STACK SC		
International 800 x 1200mm	Universal Twin Sheet Pallet	47.24" 1,200 mm	31.5" 800 mm	5.5" 140 mm	15 lbs 6.8 kg	Black	992 lbs 450 kg	4850 lbs 2,200 kg	40	40	2,250	1,176

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

International Pallet

SPECIFICATIONS

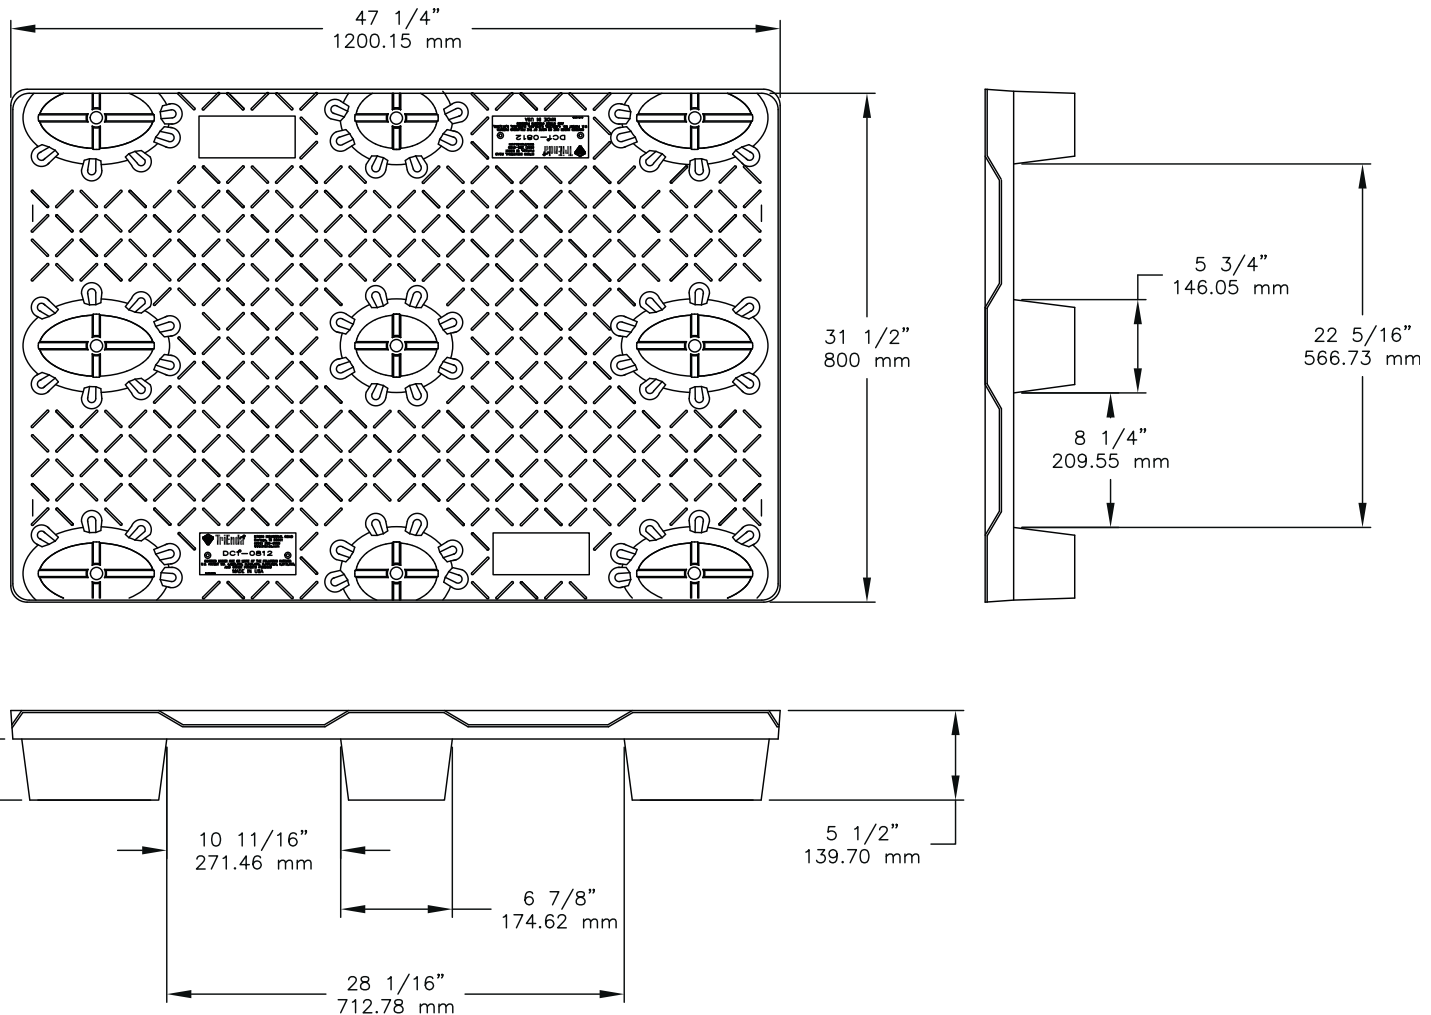

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy
Clean



Sanitary



Weather
Resistant



Impact
Resistant



4-Way
Forklift/jack
Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

