

PRODUCT DETAILS AND SPECIFICATIONS

Load Locker Board

40x48

Thermoformed HDPE Single Sheet Construction

01 / Details

FEATURES

- Compatible with all TriEnda DC Series Pallets and similar models
- Provides load protection as a cap banded to a load and securely locates pallets stacked above
- Allows maximum storage and transportation efficiency
- Levels load for greater stack heights
- Protects cargo
- Light weight for better ergonomics
- Recessed banding slots
- Shallow deck for maximum fork entry clearance
- Stacking locators to maintain secured return trips
- Ergonomic hand holes

OPTIONS

- Tru-Grip™ provides the highest coefficient of friction
- Stripe identification
- Custom logos and/or label locations
- Drain holes

Top view



Introducing TruGrip™ offering

Introducing TruGrip™ offering the highest COF available on the market using a proprietary rubber-like material. Prevents slippage of boxes on fork tines and on floors.






02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	601.00	STACK	QTY PER STACK		QTY	QTY	QTY
		L	w	Н	WEIGHT	COLOR	HEIGHT	STD	НС	53' TLD	40' SC	40' HC
Load-Locker™ Board	Pallet Stack Board Cap	47.5" 1,207 mm	39.75" 1,010 mm	2.13" 54 mm	15 lbs 6.8 kg	Black	1.5" 38 mm	60	65	1,800	1,200	1,300

Load Locker 40x48

SPECIFICATIONS

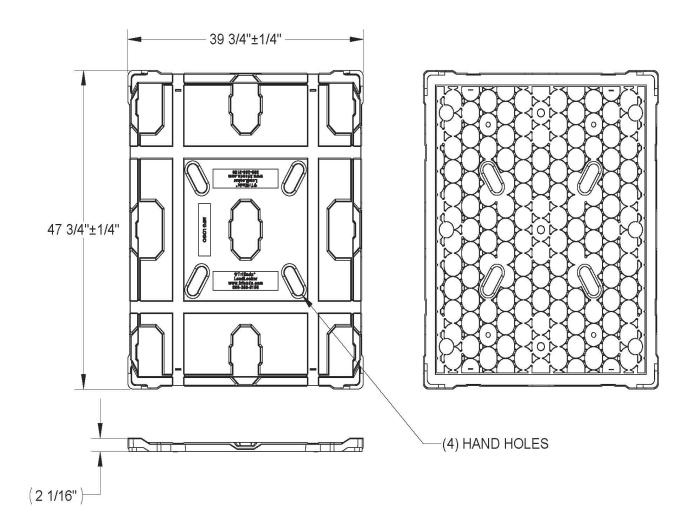

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant



4-way Forklift/jack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.





