


Greystone Pallet

48x48

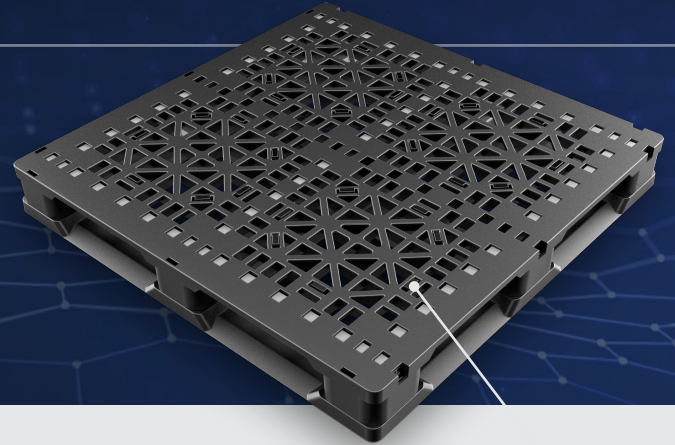

Top view


01 / Details

FEATURES

- High-pressure injection molded design using HDPE for optimal performance and durability
- Grommets on top deck and bottom runners to mitigate slippage
- Environmentally friendly and 100% recyclable
- Impact and weather resistant
- Stackable and Conveyable
- Optional Rod configurations
- Sanitary and easy to clean
- Strong and long lifespan
- 4-way Entry

OPTIONS



- Alternative material blends and colors for custom applications
- Custom trimming of runners for use with special material handling equipment
- Ink stamping for company logos and branding

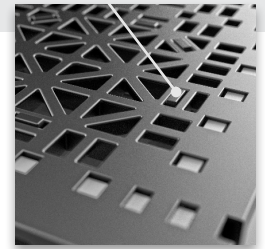

Grommets



Reinforcement Rods and Ink Stamping

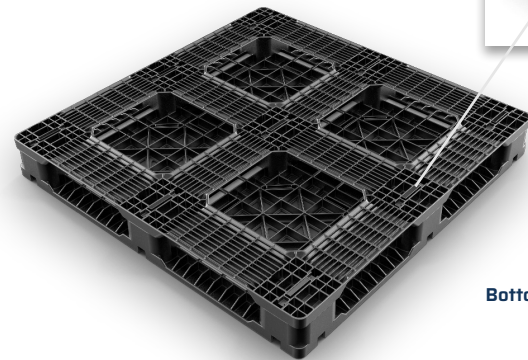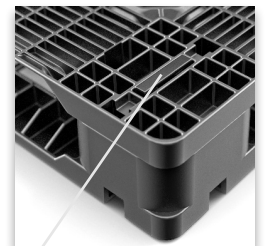

Bottom View


02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS			QTY 53' TLD
		L	W	H			DYNAMIC	STATIC	RACKING	
GS.4848.6R.0	(6) Runner / (0) rod	48" 1219.2 mm	48" 1219.2 mm	6" 152.4 mm	65 lbs 29.5 kg	Black	5,000 lbs 2,268 kg	20,000 lbs 9072 kg	n/a	468
GS.4848.6R.3LHD	(6) Runner / (3) rod	48" 1219.2 mm	48" 1219.2 mm	6" 152.4 mm	70 lbs 31.8 kg	Black	5,000 lbs 2,268 kg	20,000 lbs 9072 kg	1,800 lbs 816.5 kg	468
GS.4848.6R.2LHD.3SHD	(6) Runner / (5) rod	48" 1219.2 mm	48" 1219.2 mm	6" 152.4 mm	72 lbs 32.7 kg	Black	5,000 lbs 2,268 kg	20,000 lbs 9072 kg	2,000 lbs 907.2 kg	468

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

Greystone Pallet 48x48

SPECIFICATIONS

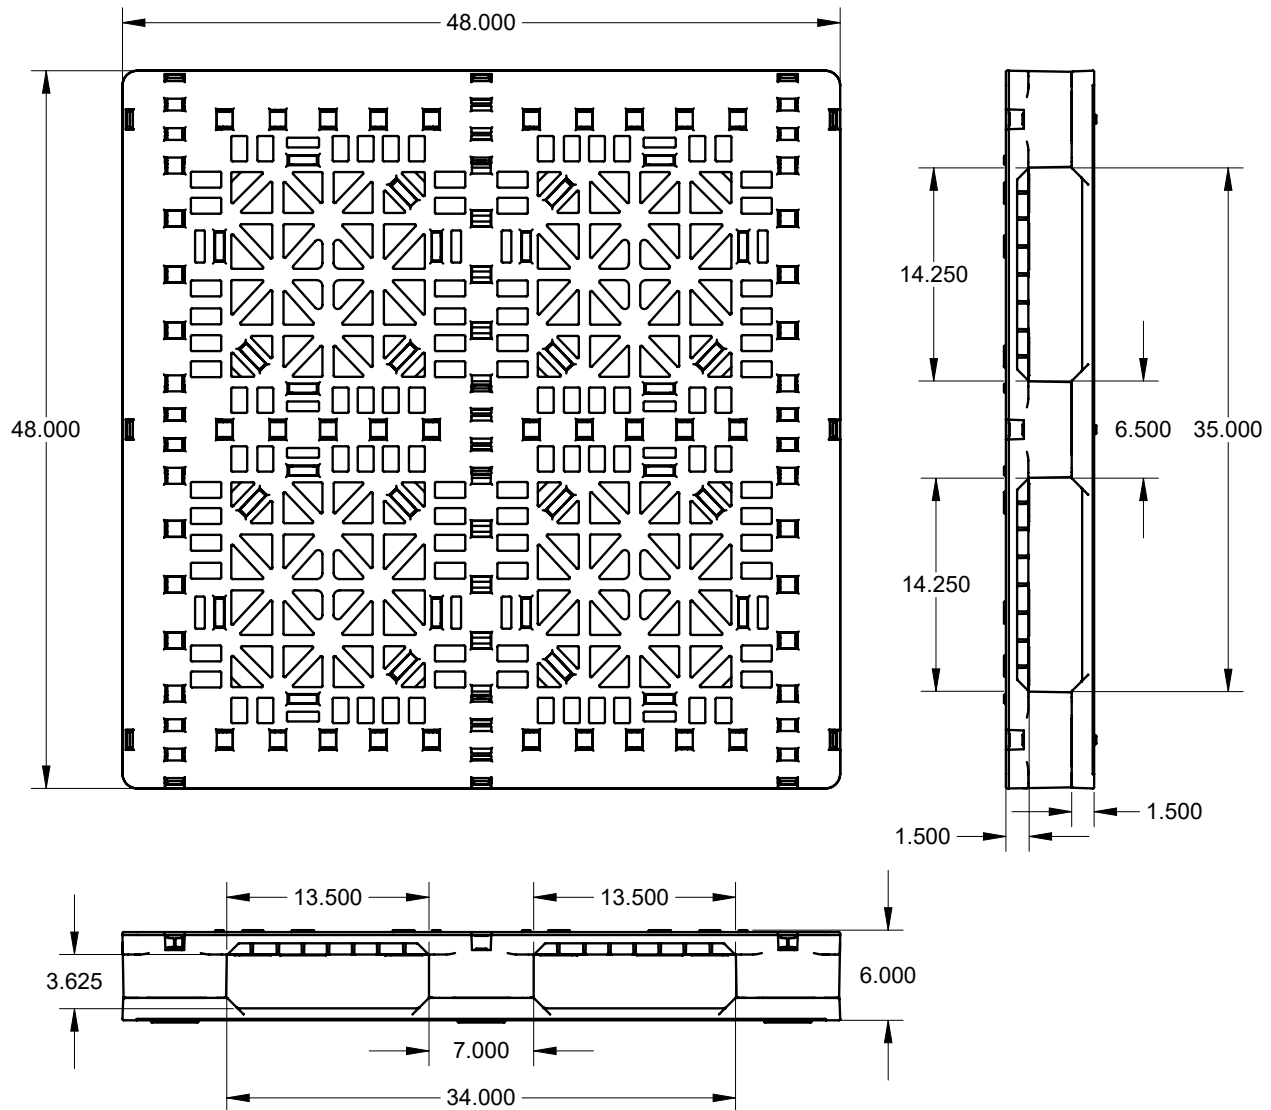

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



CONTACT US

N7660 Industrial Road Portage, WI 53901
www.triend.com | sales@triend.com
1-800-356-8150

**PALLET
BUYBACK
PROGRAM**

