

GS Rackable Pallet

37x37



Top view

01 / Details

FEATURES


- High-pressure injection molded design using HDPE for optimal performance and durability
- Full picture frame runner system for enhanced versatility and racking capability
- Grommets on top deck and bottom runners to mitigate slippage
- Environmentally friendly and 100% recyclable
- 4-way Entry
- Stackable and Conveyable
- Optional Rod configurations
- Sanitary and easy to clean

OPTIONS

- Alternative material blends and colors for custom applications
- Custom trimming of runners for use with special material handling equipment
- Ink stamping for company logos and branding



Reinforcement Rods and Ink Stamping



Grommets



Bottom View


02 / Specifications

| PRODUCT | DESCRIPTION | DIMENSIONS | | | WEIGHT | COLOR | RATINGS | | | QTY 53' TLD | QTY 40' SC |
|--------------|----------------------|-----------------|-----------------|------------------|-------------------|-------|-----------------------|-------------------------|-----------------------|-------------|------------|
| | | L | W | H | | | DYNAMIC | STATIC | RACKING | | |
| GS.3737.6R0 | (6) Runner / (0) rod | 37" 939.8 mm | 37" 939.8 mm | 5.9" 149.9 mm | 46 lbs 20.9 kg | Black | 5,000 lbs 2,268 kg | 25,000 lbs 11,340 kg | 1,200 lbs 544.3 kg | 576 | 408 |
| GS.48.40.6R4 | (6) Runner / (4) rod | 37" 939.8 mm | 37" 939.8 mm | 5.9" 149.9 mm | 50 lbs 22.7 kg | Black | 5,000 lbs 2,268 kg | 25,000 lbs 11,340 kg | 2,100 lbs 952.5 kg | 576 | 408 |

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

GS Rackable Pallet 37x37

SPECIFICATIONS

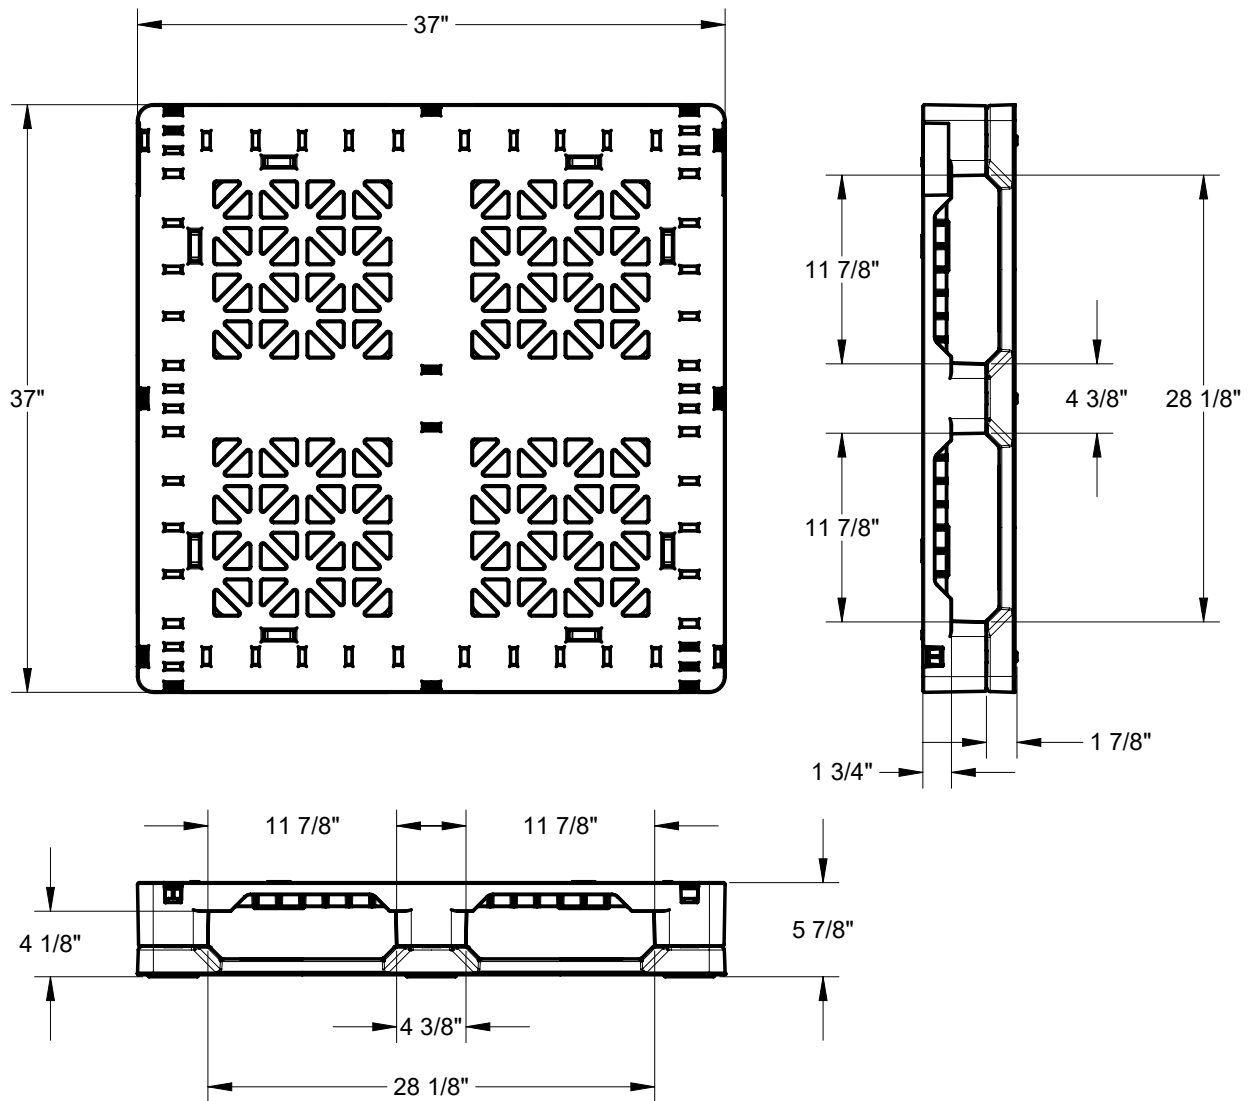

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



CONTACT US

N7660 Industrial Road Portage, WI 53901
www.triend.com | sales@triend.com
1-800-356-8150

**PALLET
BUYBACK
PROGRAM**

