

# GS Pallet 56x44

Designed for the beverage industry


## 01 / Details

### FEATURES


- 100% Recycled HDPE Plastic
- Injection molded
- Sanitary and easy to clean
- Strong and long lifespan
- Reusable and recyclable
- Impact and weather resistant
- Stackable and conveyable
- Four way entry
- Designed for the beverage industry

### OPTIONS

- Alternative material blends and colors for custom applications
- Ink stamping for company logos and branding

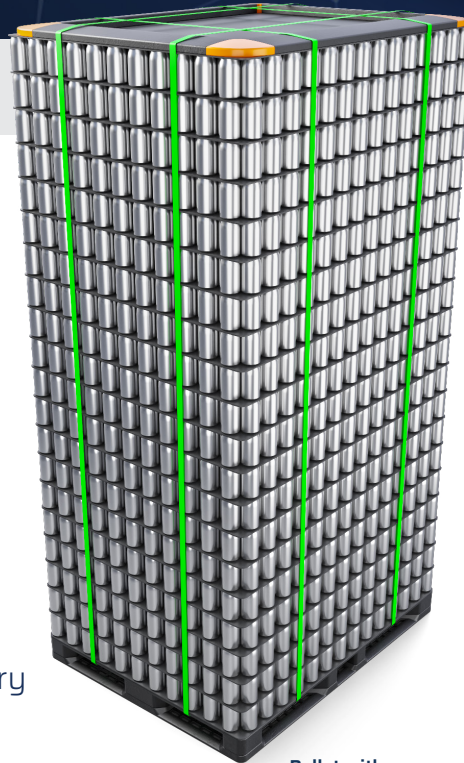



Pallet with aluminum cans

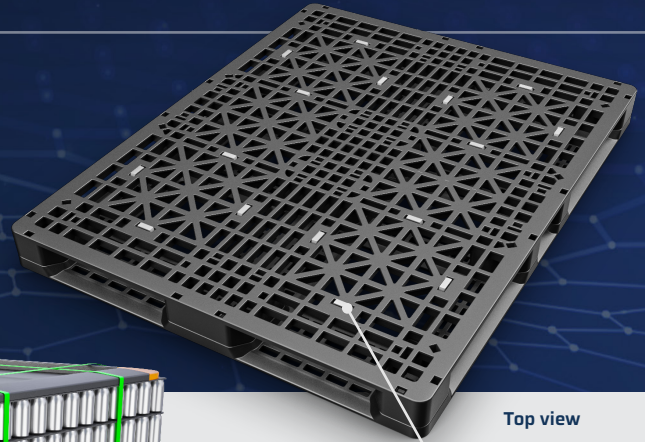

Top view



Grommets

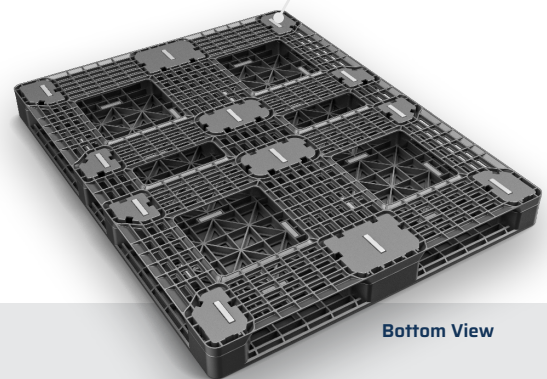

Bottom View


## 02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS			QTY 53' TLD	QTY 40' SC
		L	W	H			STATIC	DYNAMIC	RACKING		
GS.5644.7R.NP	(7) Runner	56" 1,422.4 mm	44" 1,117.6 mm	4.3" 109.2 mm	52 lbs 23.6 kg	Black	15,000 lbs 6,804 kg	2,500 lbs 1,134 kg	n/a	506	n/a
GS.5644.7R	(7) Runner / (28) Grommets	56" 1,422.4 mm	44" 1,117.6 mm	4.3" 109.2 mm	52 lbs 23.6 kg	Black	15,000 lbs 6,804 kg	2,500 lbs 1,134 kg	n/a	506	n/a

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

# GS Pallet 56x44

## SPECIFICATIONS

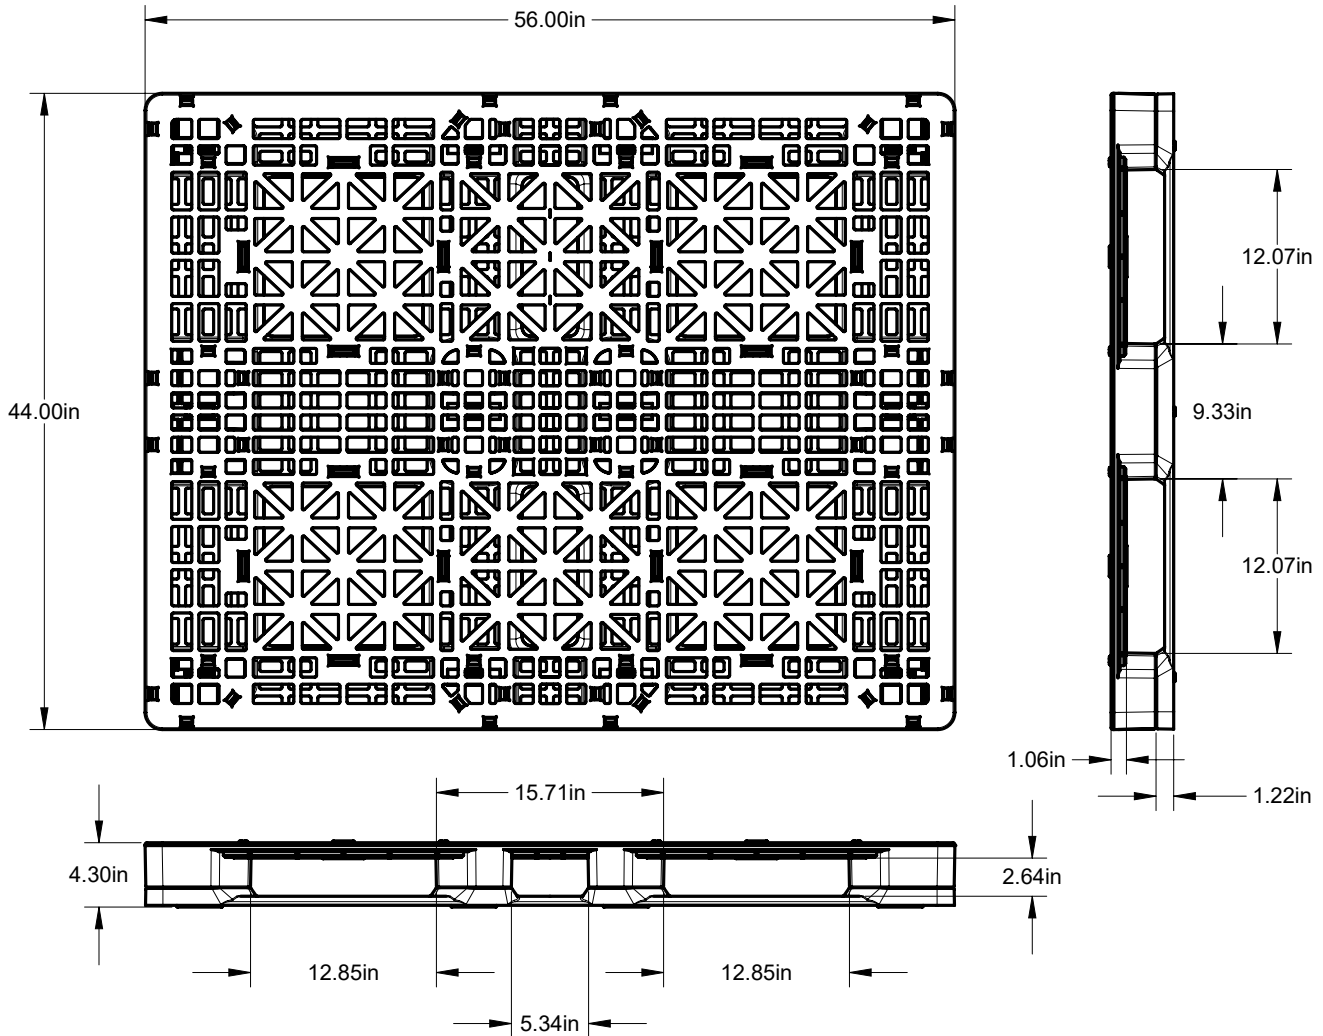

### PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant



4-Way Forklift/jack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

