


# PRODUCT DETAILS AND SPECIFICATIONS

# GS 37x32 Pallet

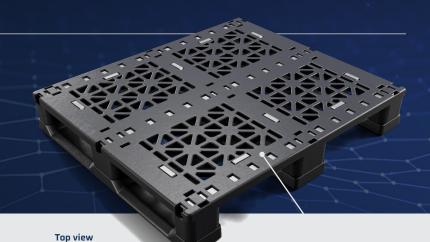

**01 /** Details

#### **FEATURES**

- 100% Recycled Plastic (HDPE)
- Injection Molded
- Sanitary and easy to clean
- Strong and long lifespan
- Reusable and recyclable
- Impact and weather resistant
- Stackable and Conveyable
- 4-way entry
- Optional rod configurations

#### **OPTIONS**

- Alternative material blends and colors for custom applications
- Custom trimming of runners for use with special material handling equipment
- Ink stamping for company logos and branding



Reinforcement Rods



Grommets




## **02** / Specifications

| PRODUCT     | DESCRIPTION           | DIMENSIONS |     |      | WEIGHT  | COLOR | RATINGS     |            |            | QTY     | QTY    |
|-------------|-----------------------|------------|-----|------|---------|-------|-------------|------------|------------|---------|--------|
|             |                       | L          | w   | Н    | WEIGHT  | COLOR | STATIC      | DYNAMIC    | RACKING    | 53' TLD | 40' SC |
| GS.3732.3R0 | (3) RUNNER<br>(0) ROD | 37"        | 32" | 5.5" | 36 lbs. | BLK   | 30,000 lbs. | 5,000 lbs. | 1,000 lbs. | 864     | 476    |
| GS.3732.3R3 | (3) RUNNER<br>(3) ROD | 37"        | 32" | 5.5" | 40 lbs. | BLK   | 30,000 lbs. | 5,000 lbs. | 2,500 lbs. | 864     | 476    |

# GS 37x32 Pallet

### **SPECIFICATIONS**

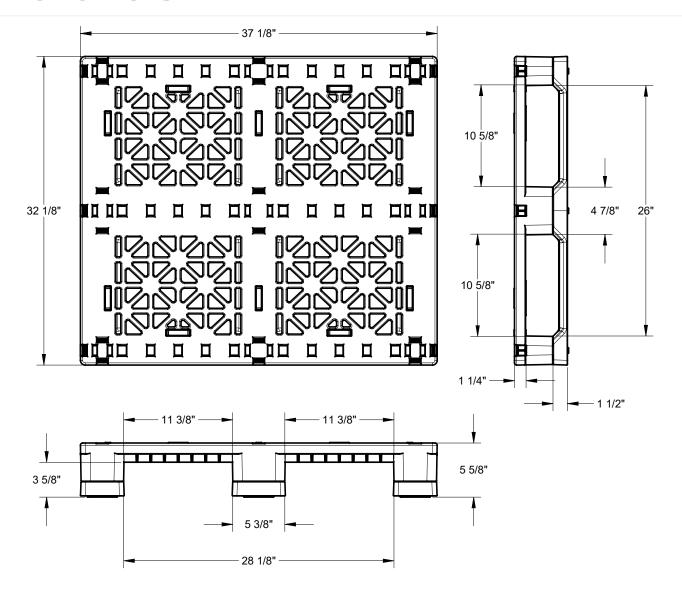

#### **PALLET ADVANTAGES**

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



**Impact** Resistant



4-Way Forklift/jack **Entry** 



Recyclable

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

