


# One-Way Pallet

40x48

Thermoformed HDPE Twin Sheet Construction

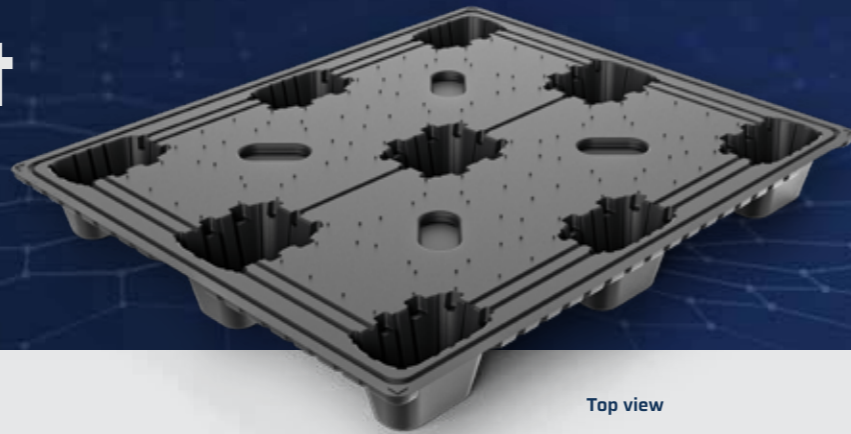


Top view

01 / Details

FEATURES

- Impact Absorbing TriMax™ design for added stiffness and durability
- Impact resistant
- Lightweight for better ergonomics
- Oval leg design minimizes damage caused by fork-tines

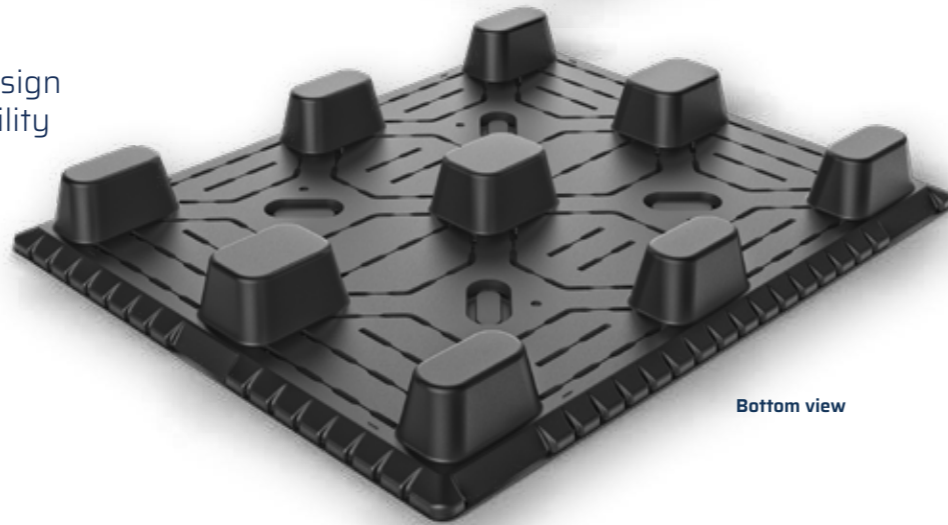


Bottom view

OPTIONS

- Custom logos and/or labels
- Handholds



Oval Legs



Nestable Pallet Design




02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
		L	W	H			DYNAMIC (UP TO)	STATIC (UP TO)		STD.	HC			
DCO 40x48	Twin Sheet One-Way Pallet	48" 1,219 mm	40" 1,016 mm	5.25" 133 mm	11.5 lbs 5.2 kg	Black	2,200 lbs 998 kg	9,000 lbs 4,082 kg	100" 2,540 mm	64	68	1,920 pallets	1,200/ 20 Skids	1,360/ 20 Skids

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

# One-Way Pallet 40x48

## SPECIFICATIONS

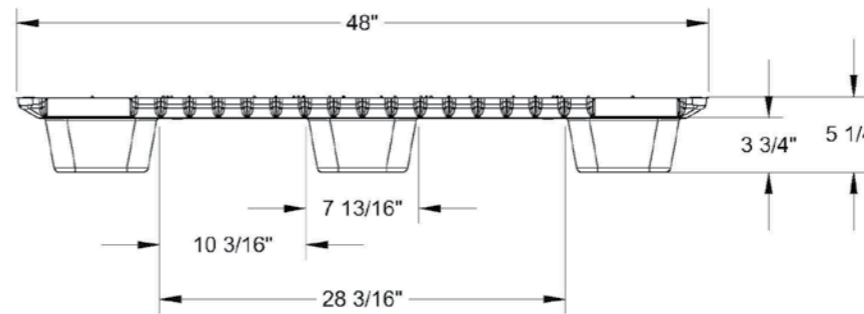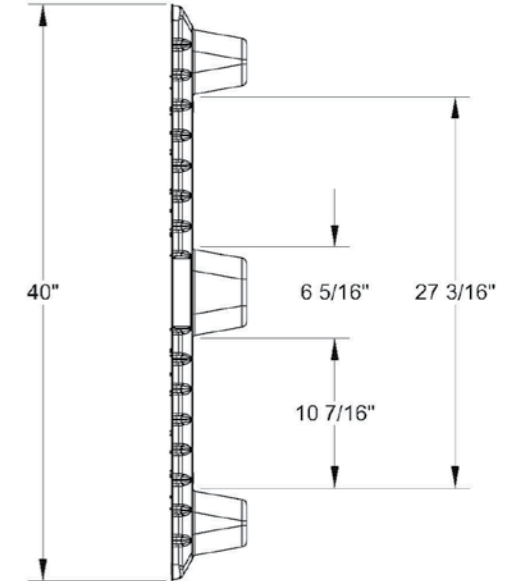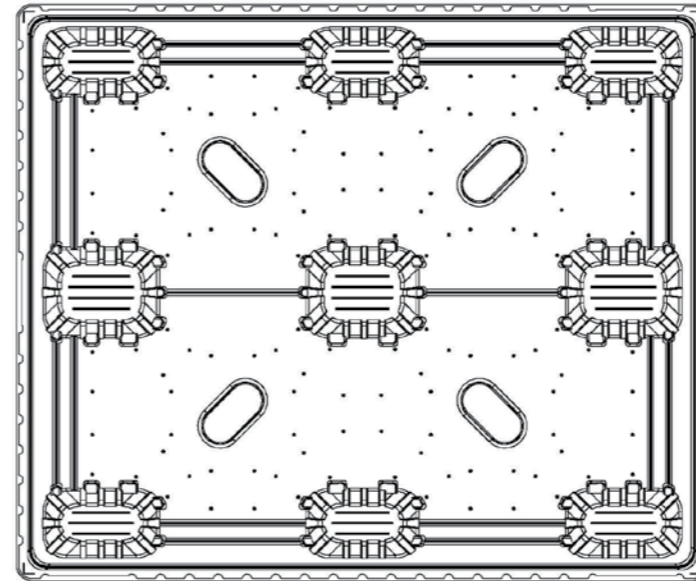

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.

