


# 40x48 Tough Pallet™

**Heavy Duty**  
Thermoformed HDPE  
Construction

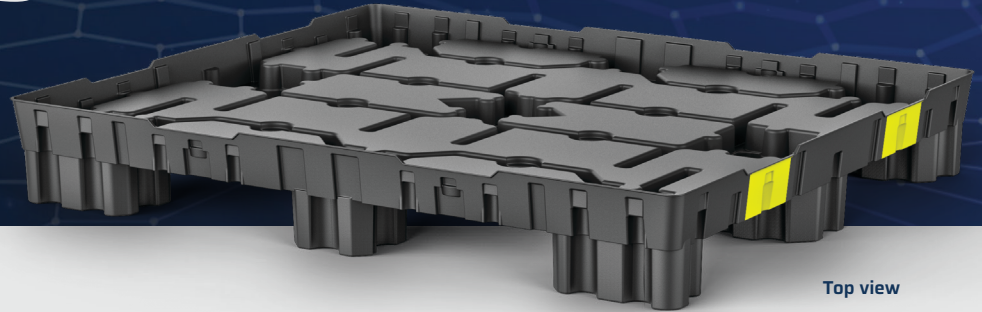

Top view

**01 / Details**

**FEATURES**

- Sanitary (no hollow areas)
- Molded in no-rust steel bars for strength & rigidity
- Thick nominal walls of 0.35"
- Provides minimal dynamic and rack deflection
- Unique design allows for racking pallet in 40" direction
- Lightweight and nestable (minimizing storage space and reducing shipping costs)
- Standard two 4" yellow stripes in 48" direction



Bottom View

**OPTIONS**

- Drain holes
- Wide range of stripe colors
- One or multiple stripes in 48" direction
- FDA materials available with virgin resin



Secure Combo Hold



Racking Feature



Fully Nestable



**02 / Specifications**

PRODUCT	DIMENSIONS			WEIGHT	COLOR	RATINGS			STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
	L	W	H			STATIC (UP TO)	DYNAMIC (UP TO)	UNSUPPORTED RACK		STD	HC			
Tough Pallet™ Reinforced	48" 1,219 mm	40" 1,016 mm	7.75" 197 mm	35 lbs 15.88 kg	Black	25,000 lbs 11,340 kg	4,000 lbs 1,814 kg	2,100 lbs 953 kg	100" 2,540 mm	27	28	810	540	560
Tough Pallet™	48" 1,219 mm	40" 1,016 mm	7.75" 197 mm	28 lbs 12.70 kg	Black	20,000 lbs 9,072 kg	3,000 lbs 1,361 kg	1,500 lbs 680 kg	100" 2,540 mm	27	28	810	540	560

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

# Tough Pallet™

## SPECIFICATIONS

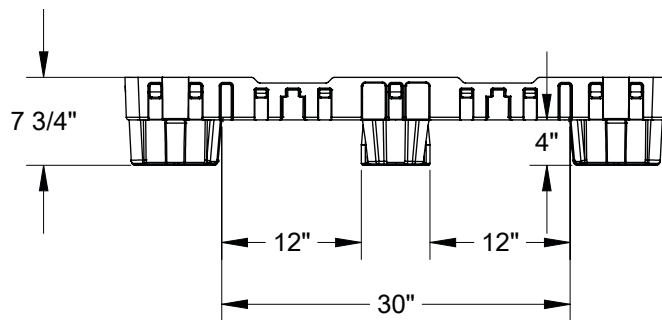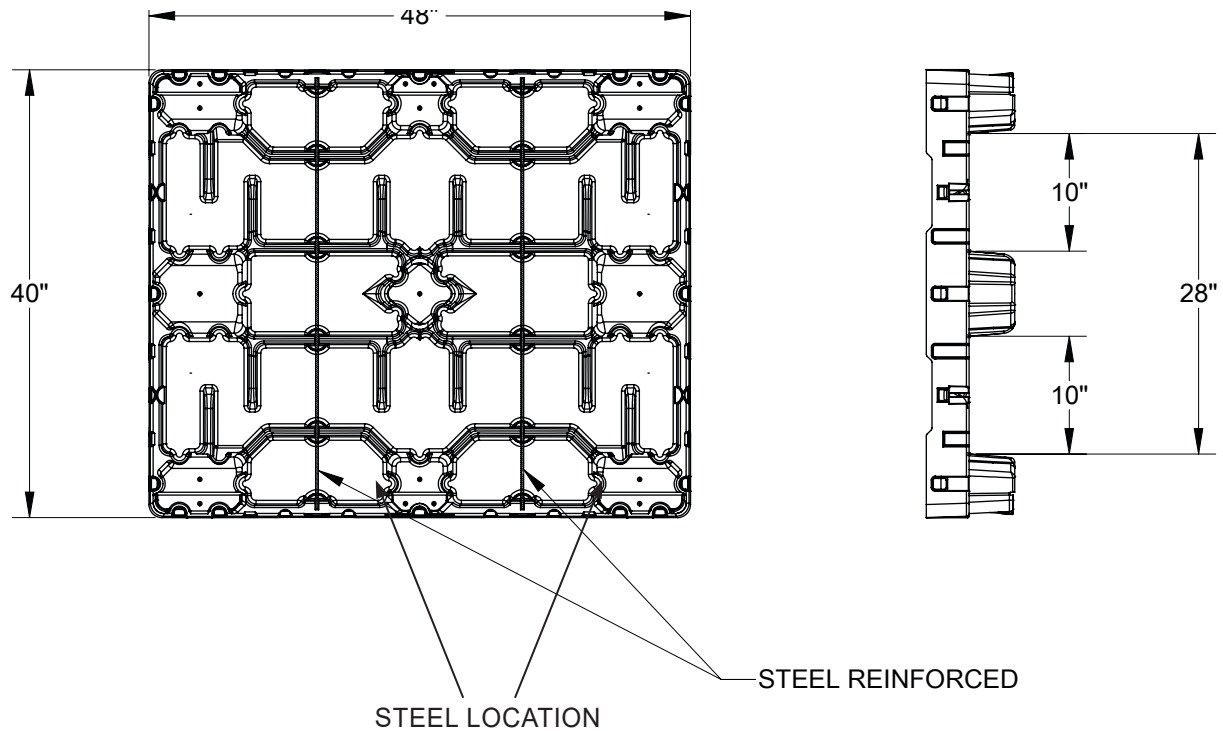

### PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



### CONTACT US

N7660 Industrial Road Portage, WI 53901  
www.triendacom | sales@triendacom  
1-800-356-8150

PALLET  
BUYBACK  
PROGRAM

