

AdaptaPak

40x48

Thermoformed HDPE
Twin Sheet Construction



01 / Details

FEATURES

- Secures sleeve to nestable pallet
- Compatible with many nestable pallets
- Serves as base and lid when inverted
- Suited for most sleeve types and thickness
- Increased interior capacity

OPTIONS

- One or multiple stripes in 48" direction
 - Wide range of colors available
- Custom colors, labels or decals
 - Available in coditherm, decals or fused in applications
- RFID labels for tracking
- TruGrip™ highest coefficient of friction to reduce slip
- Collapsible sleeves in a variety of materials

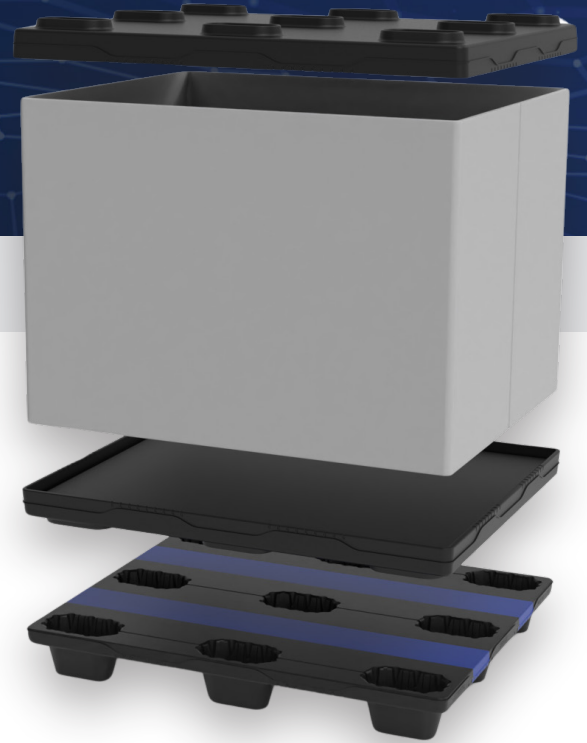

Serves As Base and Lid
When Inverted



Flat Base Locks into Pallet
Leg Holes

02 / Specifications


PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		PALLET PER STACK	PALLET PER STACK SEA CONTAINER	QTY 53' TLD	QTY 40' SEA CONTAINER
		L	W	H			DYNAMIC (UP TO)	STATIC (UP TO)				
DC6U 40x48	Universal Twin Sheet Pallet	48" 1,219 mm	40" 1,016 mm	6.50" 165 mm	21 lbs 10 kg	Black	3,500 lbs 1,588 kg	14,000 lbs 6,350 kg	40	42	1,260/30 Skids	820/20 Skids
AdaptaPak	Twin Sheet Base / Lid	48.625 1,133 mm	40.625" 1,032 mm	2.625" 66 mm	21.6 lbs 9.8 kg	Black	Varies	Varies	Varies	Varies	Varies	Varies

Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.


AdaptaPak 40x48

SPECIFICATIONS

AdaptaPak

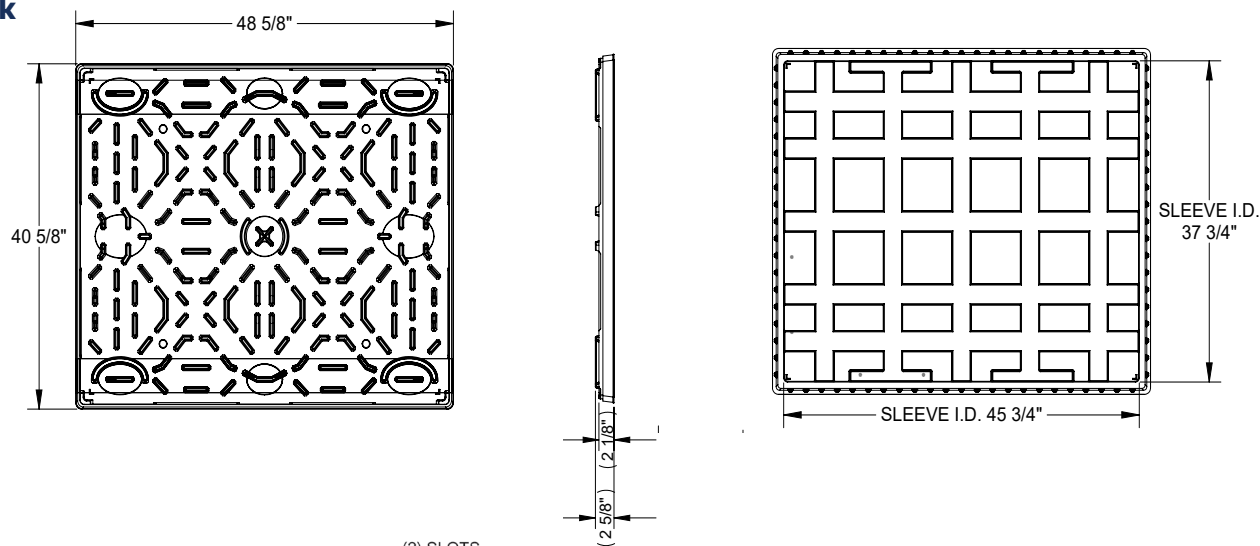

DC6

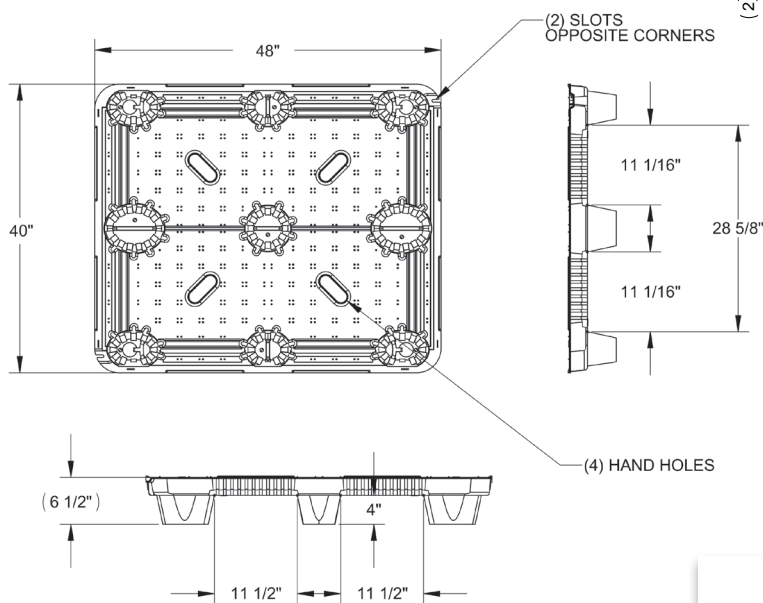

SLEEVE SHIPPING INFORMATION

QTY PER STACK	SLEEVE HEIGHT
2 High in Trailer	44.5" (1,130 mm)
3 High in Trailer	28.5" (724 mm)
4 High in Trailer	20.25" (514 mm)

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Twin-Sheet
Thermoformed Sleeve



Plastic Sleeve



Paper Corrugated Sleeve

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



CONTACT US

N7660 Industrial Road Portage, WI 53901
www.triend.com | sales@triend.com
 1-800-356-8150

PALLET BUYBACK PROGRAM

