

UltraPak

40x48 TP

Thermoformed HDPE
Twin Sheet Construction

01 / Details

FEATURES

- 18 leg feet act as wide base
- Pallet and lid are interchangeable
- Minimizes storage space, reduces shipping costs
- Heavy duty performance
- Lightweight for better ergonomics

OPTIONS

- Peanut lock provides unit security and eliminates need for stretch wrapping
- One or multiple stripes in 48" direction
 - Wide range of colors available
- Leg drain holes
- Custom colors, labels or decals
 - Available in coditherm or fused in applications
 - Variety of sleeve material and performance options
- RFID for tracking



Bottom View



Nestable Legs



Interlocking Pallet / Lid Legs



Peanut Lock


02 / Specifications

PRODUCT	DESCRIPTION	DIMENSIONS			WEIGHT	COLOR	RATINGS		STACK HEIGHT	QTY PER STACK		QTY 53' TLD	QTY 40' SC	QTY 40' HC
		L	W	H			FORK	FLOOR		STD.	SC/HC			
BP4048U TP	Twin Sheet Pallet	48.19" 1,224 mm	40.19" 1,021 mm	6.13" 156 mm	21.7 lbs 9.84 kg	Black	1800 lbs 816 kg	5,000 lbs 2,268 kg	100" 2,540 mm	48	47/53	1,440/ 30 Skids	940/ 20 Skids	1,060/ 20 Skids


Performance characteristics vary with applications. To optimize nominal specifications, loads must be evenly distributed to reach capacity. Load construction, support conditions, transportation, load retention, user facility and temperature are factors that affect pallet capacity.

UltraPak 40x48 TP

SPECIFICATIONS

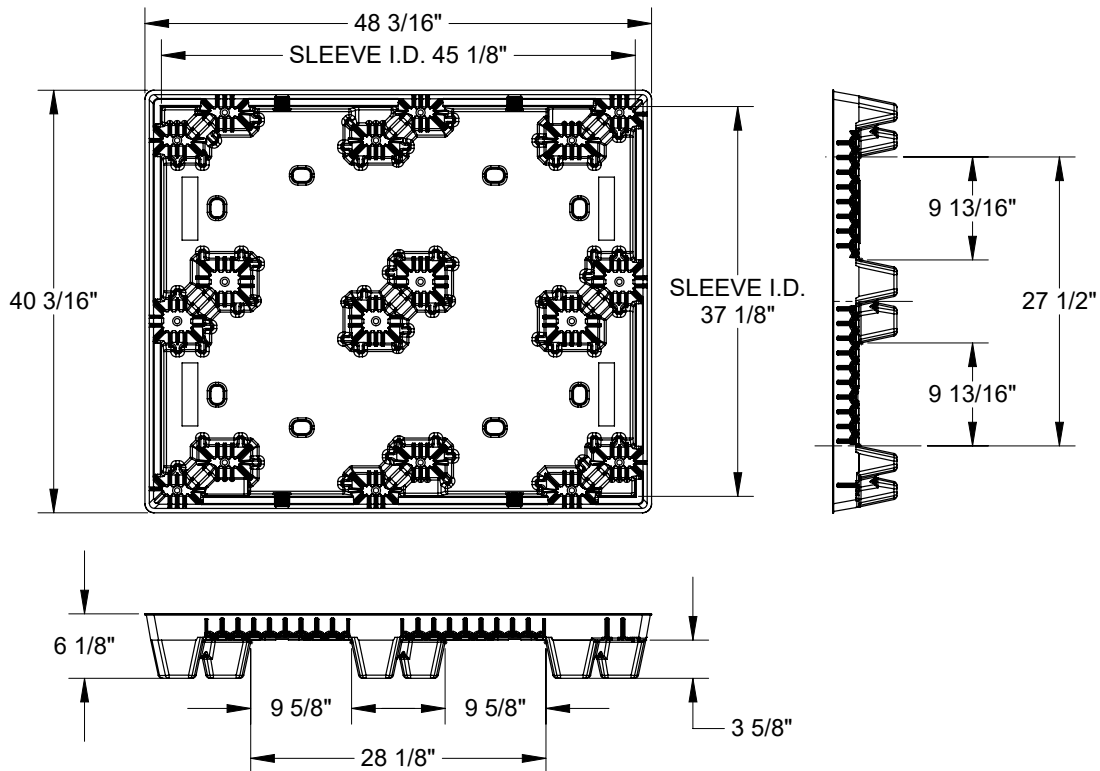

Paper Corrugated Sleeve



Twin-Sheet Thermoformed Sleeve



Plastic Sleeve

SLEEVE SHIPPING INFORMATION

QTY PER STACK	SLEEVE HEIGHT
2 High in Trailer	44.5" (1,130 mm)
3 High in Trailer	28.5" (724 mm)
4 High in Trailer	20.25" (514 mm)

PALLET ADVANTAGES

- Environmentally Friendly
- ISPM 15 Exempt
- Long Service Life



Easy Clean



Sanitary



Weather Resistant



Impact Resistant



4-Way Forklift/jack Entry



Recycle

TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.



CONTACT US

N7660 Industrial Road Portage, WI 53901
www.triend.com | sales@triend.com
 1-800-356-8150

PALLET BUYBACK PROGRAM

