

BP4048B SP**FEATURES**

- ▲ Four-way entry for quicker more efficient handling
- ▲ Made from HDPE – Environmentally friendly and 100% recyclable
- ▲ Fully nestable to conserve space – Lowers return cost
- ▲ Mirror image – Pallet/lid interchangeable
- ▲ Lightweight for better Ergonomics – Worker friendly
- ▲ Lower cost alternative vs. rigid alternatives
- ▲ Interlocking pallet legs for secure stacking


OPTIONS

- ▲ Custom color(s)
- ▲ Custom stripe(s) – Only in 48" direction
- ▲ Leg drain holes available
- ▲ Custom logos
- ▲ Sleeve's that are collapsible
- ▲ Pocket recesses for label placement
- ▲ Ever-Lok[®]2 locations for package/unit security, also eliminates the need for stretch wrapping



BP4048B SP Specifics

BIG PAK

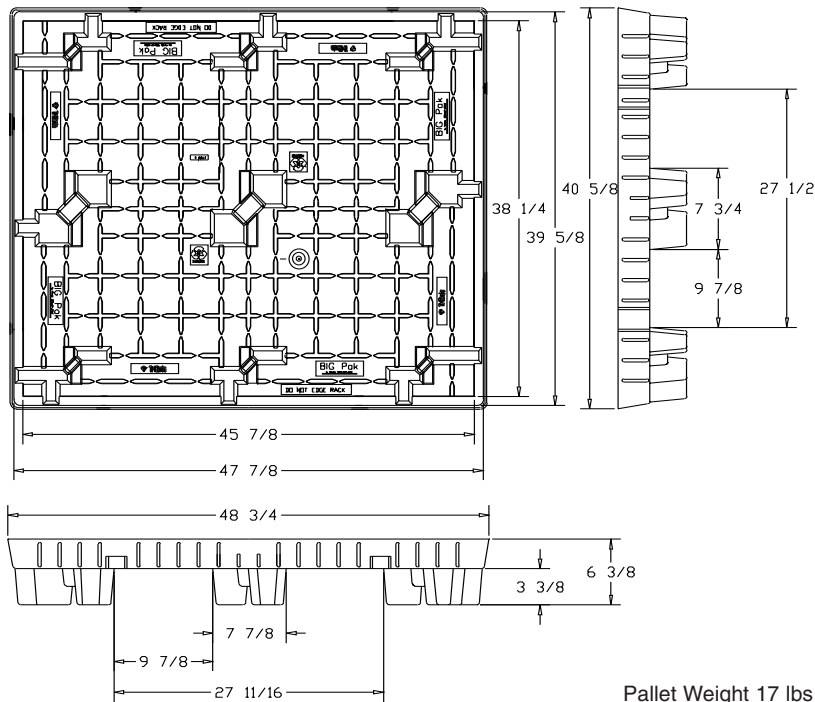

Pallet Weight 17 lbs

Pack Info

	English	Metric
Inside useable space 36" Sleeve	33 1/2"	851 mm
Inside useable space 42" Sleeve	39 1/2"	1,003 mm
Pack height 36" sleeve	43"	1,092 mm
Pack height 42" sleeve	49"	1,245 mm
Sleeve Pack Rating		
(36" tall - 1100 #, 1300#, plastic sleeves)	TBD	TBD
Sleeve Pack Rating		
(42" tall - 1100 #, 1300#, plastic sleeves)	TBD	TBD

Load Rating

Floor Load Rating	4,000 lbs	1,818 kg
Fork Load Rating	800 lbs	363 kg

Packaging

Stack Height	100"	2,540 mm
# Pallets per Stack	50	
Qty Pallets per 48 ft trailer	1,400	
Qty Pallets per 53 ft trailer	1,500	
Qty Pallets per 20 ft container	500	
Qty Pallets per 40 ft container	1,000	
Qty Pallets per 40 ft HC	1,120	
Qty Pallets per 45 ft container	1,344	
Sleeve Height 2 high in trailer	44 1/2"	1,130 mm
Sleeve Height 3 high in trailer	28 1/2"	724 mm
Sleeve Height 4 high in trailer	20 1/4"	514 mm

Interlocking pallet legs



Big Pak Sleeve Options



Fluted Plastic



Ever-lok®2



TriEnda publishes standard guidelines for its products, based on its testing standards, and, as such, these guidelines do not constitute any warranty related to each customer's individual application. The material handling industry has not standardized on test methodology and rating criteria for each individual product. All TriEnda products are sold with the understanding that the customer will validate for themselves the suitability of the product for their specific application. As each product application is unique, the customer assumes all risks associated with the determination and actual use of the pallet.